LIGHTING CATALOG

INDOOR & OUTDOOR

REKIALIGHT

ABOUT US

REKIALIGHT

We are RekiaLight, a lighting brand dedicated to redefining lighting fixtures not merely as functional elements, but as defining features that shape the identity of any space.

Our vision embraces the extraordinary challenging conventions, inspiring creativity, and bringing a distinct character to every project. Each product RekiaLight offers is carefully curated to elevate atmosphere, enhance design, and leave a lasting impression.

We strive to offer our clients a fresh perspective on lighting in both residential and commercial spaces. RekiaLight creations do more than illuminate they reveal the soul of a space, enrich its aesthetic, and highlight the unique character of every environment.

OUR PHILOSOPHY

We are driven by a passion for going beyond the ordinary, embracing lighting as a powerful tool to transform spaces and experiences.

Our products represent a refined balance between design and function challenging conventional solutions while highlighting the unique character of every environment. Each piece from RekiaLight is chosen to enhance atmosphere, express individuality, and create meaningful visual impact.

CONTENTS

- SPOT

  - Recessed Mounted 3-13
  - Adjustable Recessed Mounted 14-25
  - Surface Mounted 26-31
  - Adjustable Surface Mounted 32-35
  - Trimless 36-37
  - Trimless Adjustable 38-41
  - Pendant 42-44

- TRACKLIGHT 45-56

- LINEAR

  - Recessed Mounted 57-62
  - Adjustable Recessed Mounted 63-64
  - Surface Mounted 65-69
  - Trimless 70-71
  - Pendant 72-78

- DECORATIVE 79-89

- APLIQUE

  - Recessed Mounted 90-91
  - Surface Mounted 92-102

- COVE LIGHTING 103-105

- PARKING LOT LUMINAIRES 106-107

- PROJECTOR 108-111

- EXTERIOR


  - Street & Road Lighting 112-114
  - Park & Garden IP65 Protection 115-122
  - Facade IP65 Protection 123-129


- UL CERTIFICATIONS 130-133

SPOT

Recessed Mounted

Alva

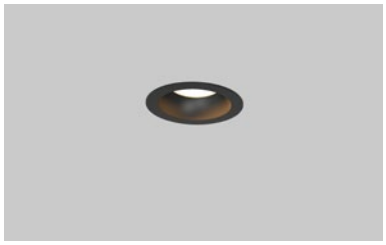

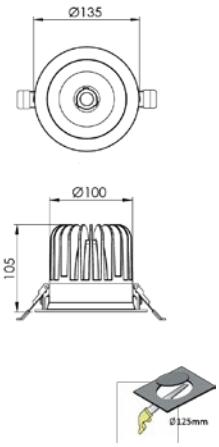



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Alva Plus

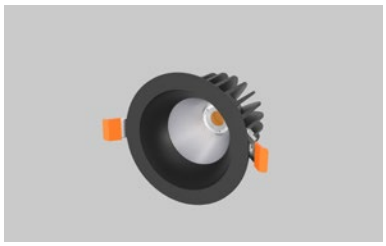

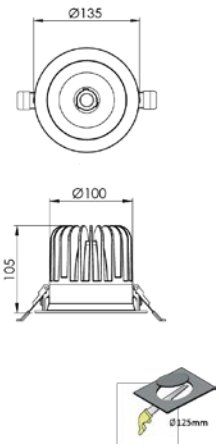


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	3000-3500-4000K	2830 lm	135lm/W	COB LED
28 W	3000-3500-4000K	3842 lm	135lm/W	COB LED
35 W	3000-3500-4000K	4593 lm	135lm/W	COB LED

220 240 V~ | IP20 | CRI>90 | 15°,24°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Arden – 1 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	120 lm	120lm/W	HP LED
3 W	2700-3000-4000-5000-6500K	360 lm	120lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Arden – 3 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	840 lm	120lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Arden – 5 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W	2700-3000-4000-5000-6500K	1440 lm	120lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Arden – 6 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
13 W	2700-3000-4000-5000-6500K	1560 lm	120lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Arden – 10 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2400 lm	120lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 12° ,36° ,48° ,10×35°Elptc. | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Brisa



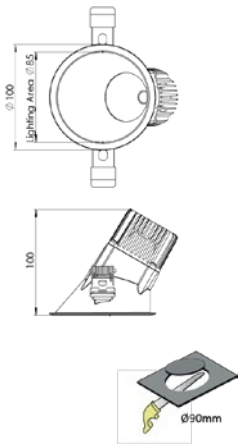



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1260 lm	90lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	630 lm	90lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	810 lm	90lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Elin

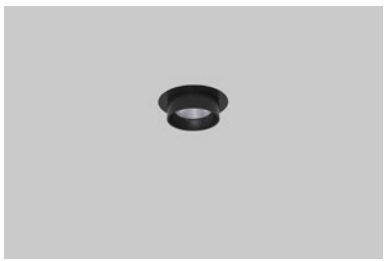

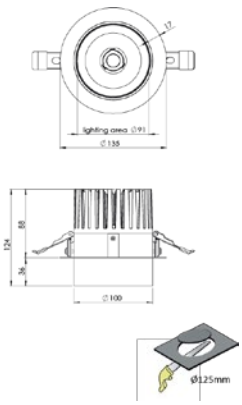


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Elin – 50 Long



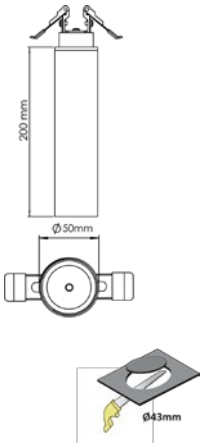


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1000 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	800 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Elin – 90



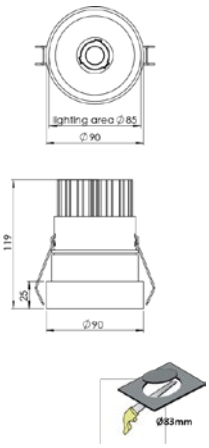


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1048 lm	105lm/W	COB LED
14 W	2700-3000-4000-5000-6500K	1475 lm	105lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Kora



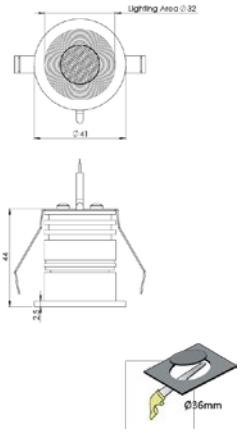


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	80 lm	80lm/W	HP LED
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Kora – 2



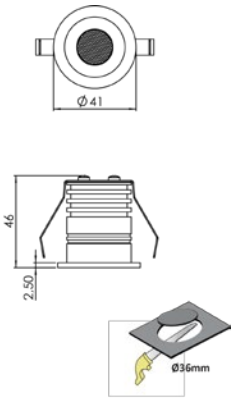


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED

220 240 V~ | IP54 | CRI>80 | 10°,25°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Lior - 3 Duo







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
40 W	2700-3000-4000-5000-6500K	4200 lm	105lm/W	COB LED
56 W	2700-3000-4000-5000-6500K	5880 lm	105lm/W	COB LED
70 W	2700-3000-4000-5000-6500K	7350 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15° ,24° ,40° ,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Lumo

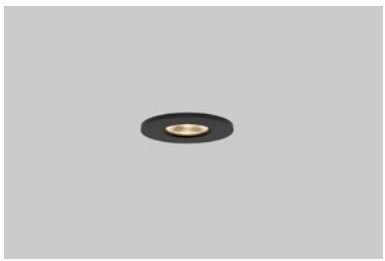

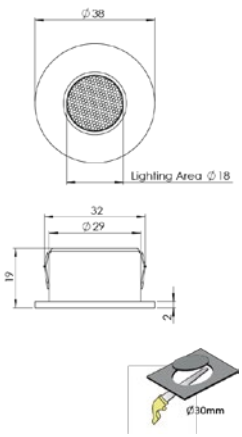


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	80 lm	80lm/W	POWER LED
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	POWER LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Mora



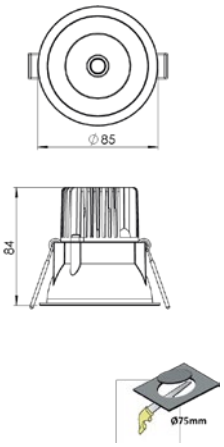


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Natt



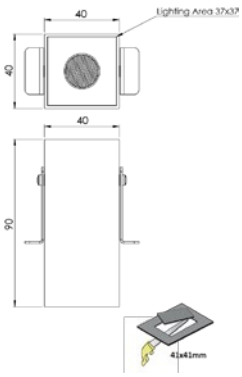



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,2 W	2700-3000-4000-5000-6500K	256 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Nerra

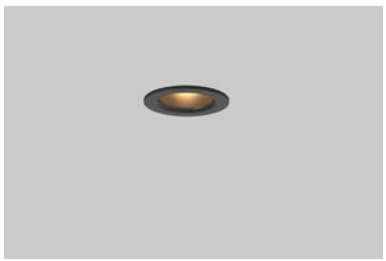

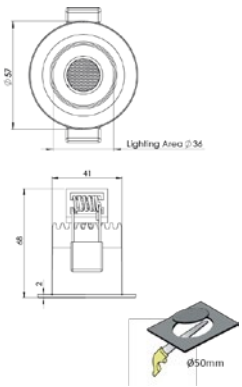


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	100 lm	100lm/W	HP LED
3 W	2700-3000-4000-5000-6500K	300 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Silen



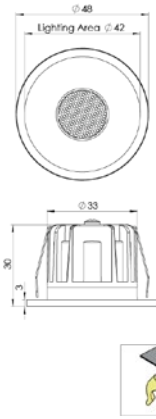



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	80 lm	80lm/W	HP LED
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Soren – 3

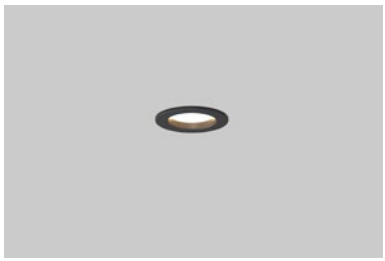

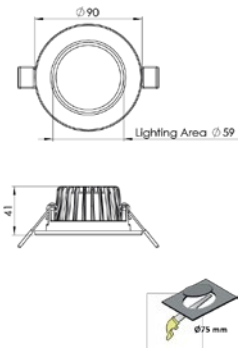



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	602 lm	86lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Soren – 4

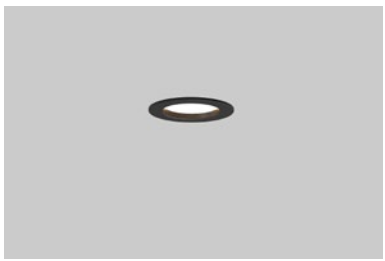

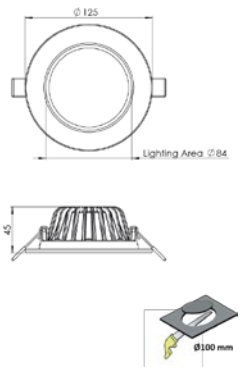



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1204 lm	86lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Soren – 6

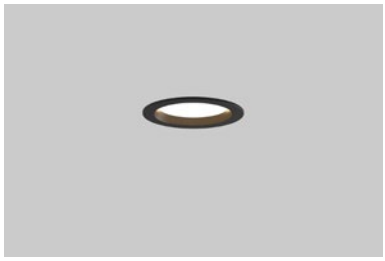

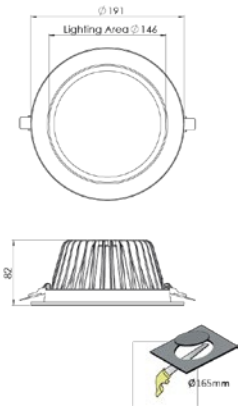


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
18 W	2700-3000-4000-5000-6500K	1548 lm	86lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Soren – 6 REF



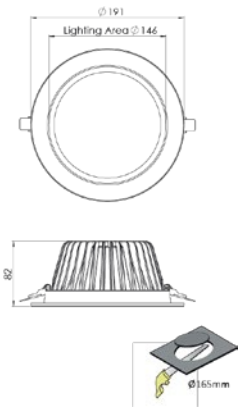



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
21 W	2700-3000-4000-5000-6500K	1806 lm	86lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Soren – 6 SLIM

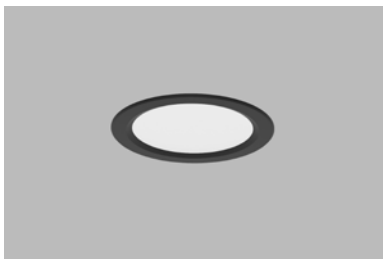





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1414 lm	101lm/W	MP LED
20 W	2700-3000-4000-5000-6500K	2020 lm	101lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Soren – 8

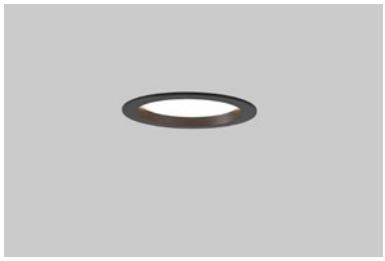

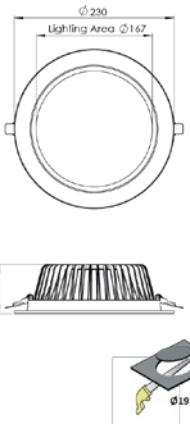


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
23 W	2700-3000-4000-5000-6500K	1978 lm	86lm/W	MP LED
30 W	2700-3000-4000-5000-6500K	2580 lm	86lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Taro



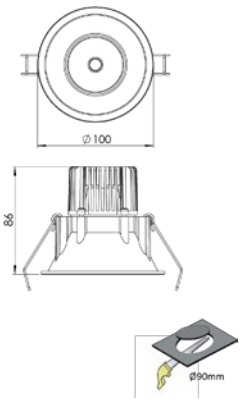


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
5 W	2700-3000-4000-5000-6500K	500 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Taro – S



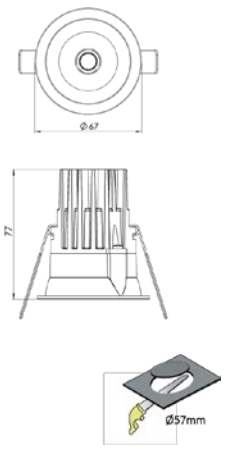


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1000 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
8,5 W	2700-3000-4000-5000-6500K	850 lm	100lm/W	COB LED

220 240 V~ | IP20 - IP44 - IP65 | CRI>80 CRI>90 | 15°,24°,36° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tova



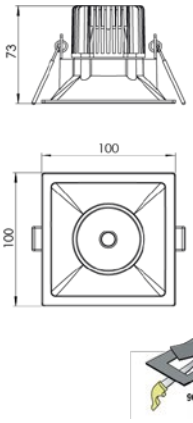



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Vela – 4

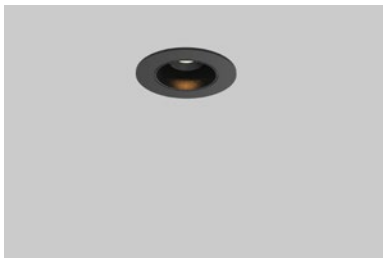

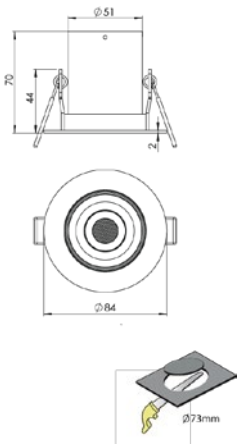

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	3000-4000-5000-6500K	200 lm	80lm/W	POWER LED
5 W	3000-4000-5000-6500K	400 lm	80lm/W	POWER LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class II | F | RAL


Lumen value is given according to 3000K value.

SPOT

Adjustable Recessed Mounted

Asto



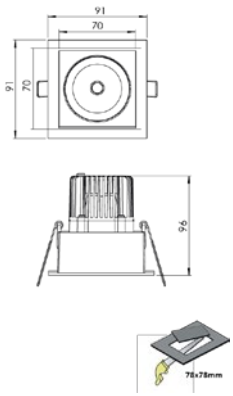


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36° | ADJUSTABLE 28°&28° | Class II | F | RAL

Lumen value is given according to 4000K value.

Asto Duo



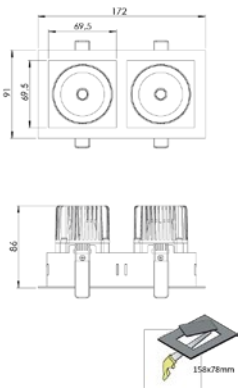


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
18 W	2700-3000-4000-5000-6500K	1800 lm	100lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2800 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36° | ADJUSTABLE 30°&30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Aven



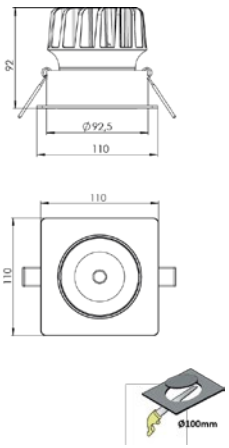


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2069 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Bjara Duo R







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
18 W	2700-3000-4000-5000-6500K	1854 lm	103lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2884 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Elda

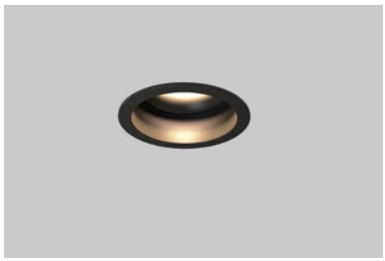

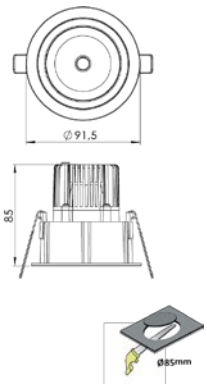


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30°&30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Halo



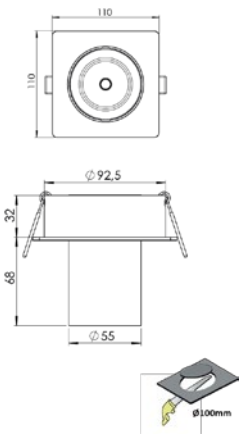


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Kalen






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	80 lm	80lm/W	HP LED
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 15°&15° | Class II | F | RAL

Lumen value is given according to 3000K value.

Kemi – 2







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2100 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2940 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3675 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15° ,24°,40° ,60° | ADJUSTABLE 22°&22° | Class II | F | RAL

Lumen value is given according to 4000K value.

Kiva – 2

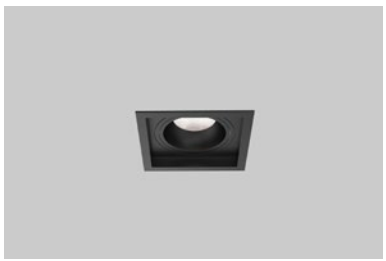





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2100 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2940 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3675 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 22° & 22° - 350° | Class II | F | RAL

Lumen value is given according to 4000K value.

Lior – 2

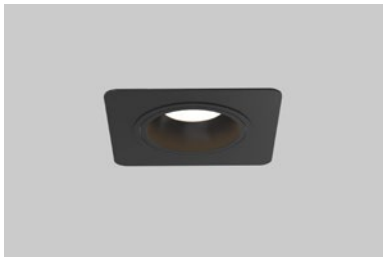

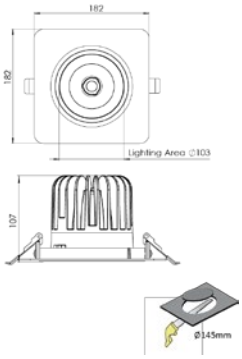



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2100 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2940 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3675 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15° ,24°,40° ,60° | ADJUSTABLE 22°&22°- 350° | Class II | F | RAL

Lumen value is given according to 4000K value.

Lior – 2 Duo

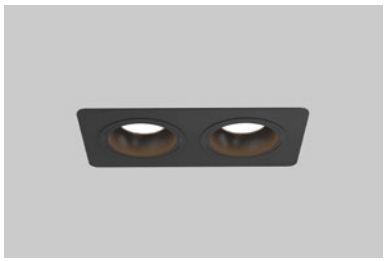




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
40 W	2700-3000-4000-5000-6500K	4200 lm	105lm/W	COB LED
56 W	2700-3000-4000-5000-6500K	5880 lm	105lm/W	COB LED
70 W	2700-3000-4000-5000-6500K	7350 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15° ,24° ,40° ,60° | ADJUSTABLE 22°&22°- 350° | Class II | F | RAL

Lumen value is given according to 4000K value.

Lior – 2 Trio







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
105 W	2700-3000-4000-5000-6500K	11025 lm	105lm/W	COB LED
60 W	2700-3000-4000-5000-6500K	6300 lm	105lm/W	COB LED
84 W	2700-3000-4000-5000-6500K	8820 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15° ,24° ,40° ,60° | ADJUSTABLE 22°&22°- 350° | Class II | F | RAL

Lumen value is given according to 4000K value.

Miro 85

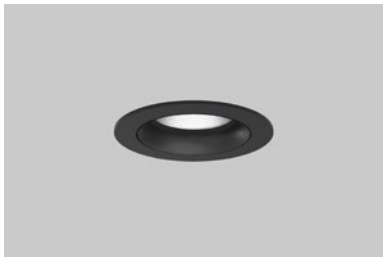

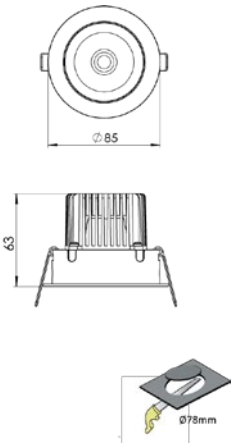


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 14°&14° | Class II | F | RAL

Lumen value is given according to 4000K value.

Miro 110



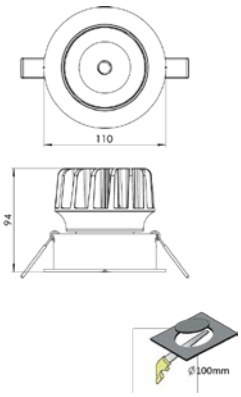


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2069 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Niva



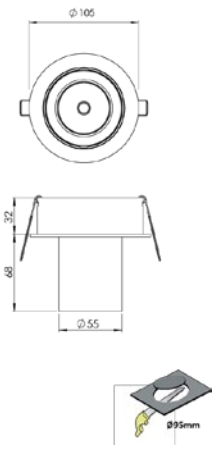


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30°&30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Niva – 48 R



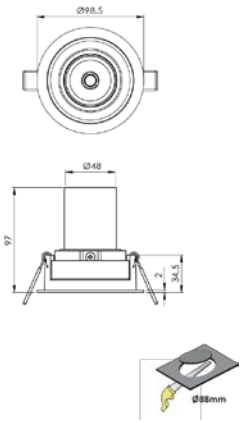


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1030 lm	103lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 18°&18° | Class I | F | RAL

Lumen value is given according to 4000K value.

Niva – 48 R Long



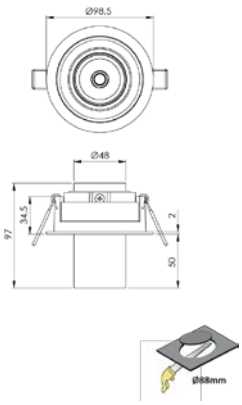


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1030 lm	103lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 18°&18° | Class I | F | RAL

Lumen value is given according to 4000K value.

Noct



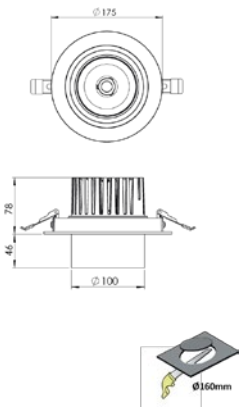



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 28°&28° | Class II | F | RAL

Lumen value is given according to 4000K value.

Oris – R

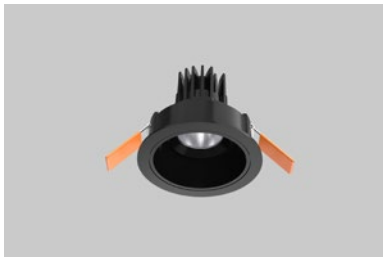

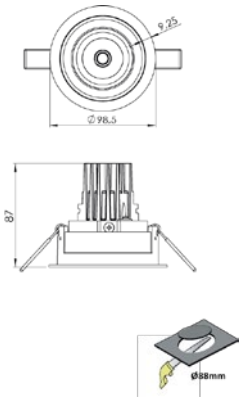



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1000 lm	100lm/W	COB LED
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 25°&25° | Class II | F | RAL

Lumen value is given according to 4000K value.

Riven – 1

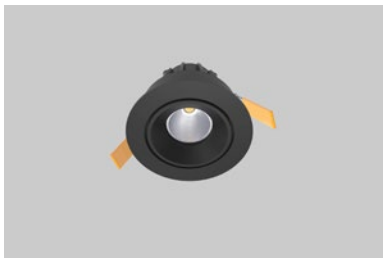




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	485 lm	97lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	776 lm	97lm/W	COB LED

220 240 V~ | IP66 | CRI>80 CRI>90 | 15°,24° ,36° ,60° | ADJUSTABLE 5°& 5°-350° | Class I | F | RAL

Lumen value is given according to 4000K value.

Ronae



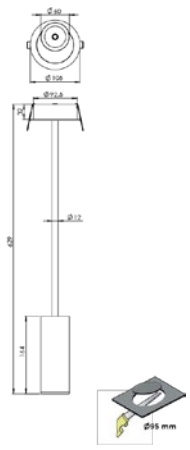



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	1133 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Sable

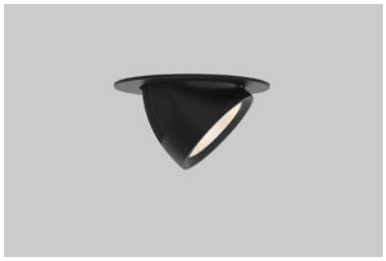

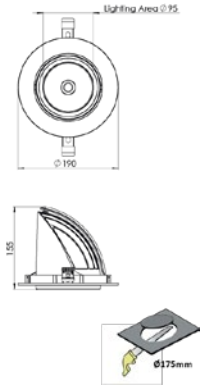


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	1820 lm	91lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2548 lm	91lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3185 lm	91lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 40° | ADJUSTABLE 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Skar



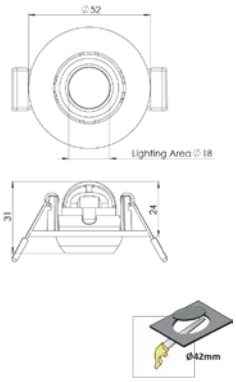


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1 W	2700-3000-4000-5000-6500K	80 lm	80lm/W	HP LED
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 14°&14° | Class II | F | RAL

Lumen value is given according to 3000K value.

Tiven



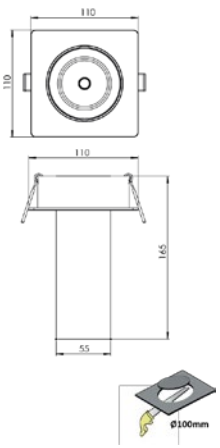


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 28° & 28° | Class II | F | RAL

Lumen value is given according to 4000K value.

Vardo



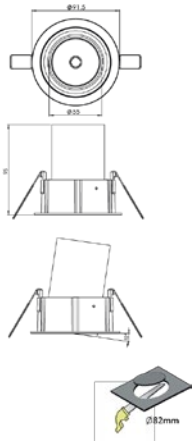


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 10°&10° | Class II | F | RAL

Lumen value is given according to 4000K value.

Vardo - 48



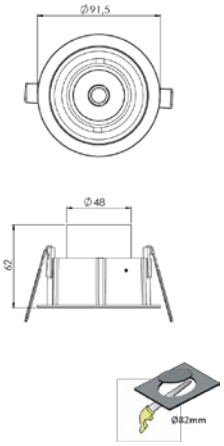


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 15°&15° | Class II | F | RAL

Lumen value is given according to 4000K value.

Vela



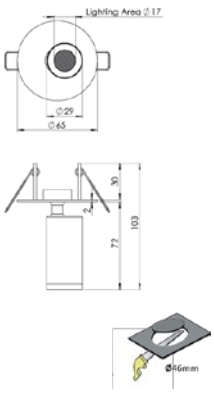


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	2700-3000-4000-5000-6500K	200 lm	80lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	400 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 15°&15°- 360° | Class II | F | RAL

Lumen value is given according to 3000K value.

Vetra – 48



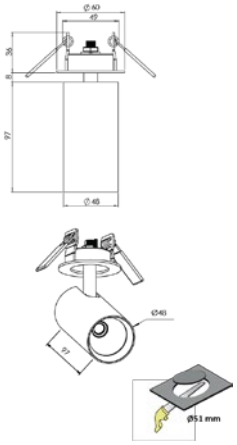


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350°- 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Vetra - 60



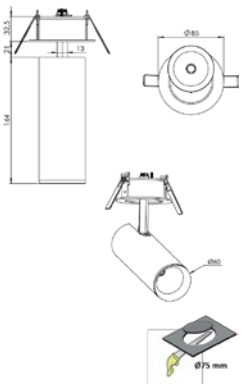


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	1133 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Vetra - 76



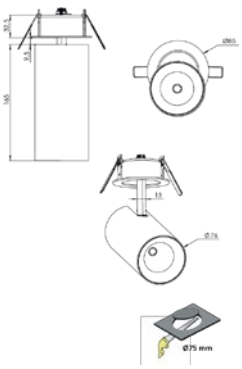


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Vetra - 100



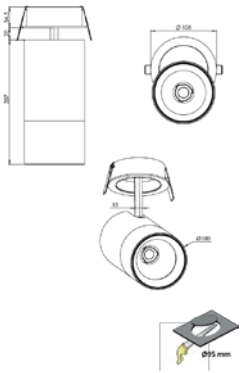

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL


Lumen value is given according to 4000K value.

SPOT

Surface Mounted

Fera - 4



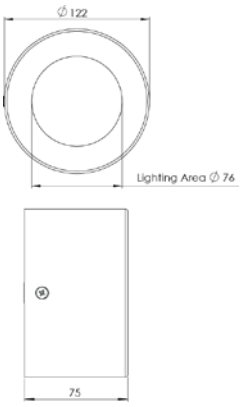


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	946 lm	86lm/W	MP LED
14 W	2700-3000-4000-5000-6500K	1204 lm	86lm/W	MP LED
7 W	2700-3000-4000-5000-6500K	602 lm	86lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Pola



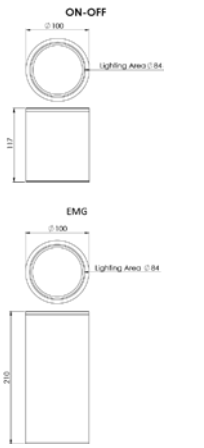


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W EMG	2700-3000-4000-5000-6500K	860 lm	86lm/W	MP LED
10 W ON-OF	2700-3000-4000-5000-6500K	860 lm	86lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Riven – 2



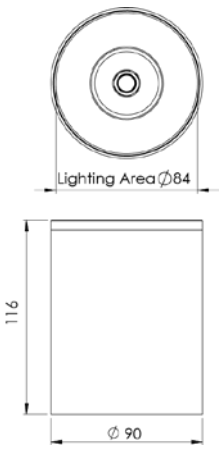


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	485 lm	97lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	776 lm	97lm/W	COB LED

220 240 V~ | IP66 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Solde



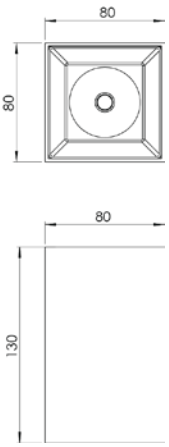



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Solde Duo

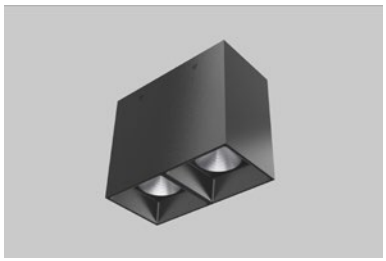

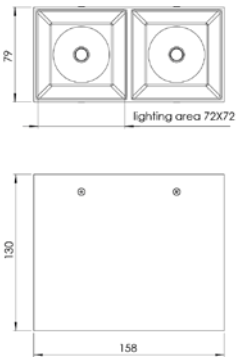


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2069 lm	103lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2884 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Soren – 6 S





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
18 W	2700-3000-4000-5000-6500K	1548 lm	86lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Tund – 40






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,2 W	2700-3000-4000-5000-6500K	256 lm	80lm/W	HP LED

220 240 V~ | IP40 | CRI>80 | 10°,25°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Tund – 55



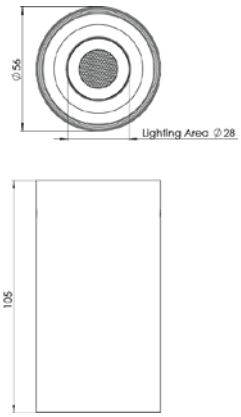


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	3000-4000-5000-6500K	200 lm	80lm/W	HP LED
5 W	3000-4000-5000-6500K	400 lm	80lm/W	HP LED

220 240 V~ | IP40 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 15° & 15° - 360° | Class II | F | RAL

Lumen value is given according to 3000K value.

Tund - 60



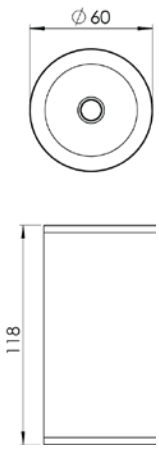


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	1133 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tund - 76



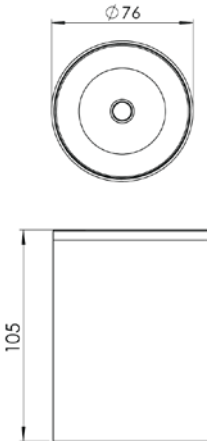


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tund - 80



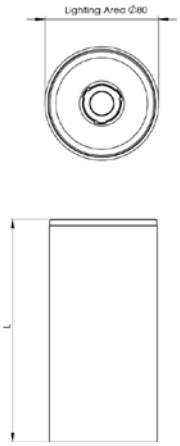


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1470 lm	105 lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2096 lm	105 lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105 lm/W	COB LED

220 240 V~ | IP40 | CRI>90 | 24° ,40° ,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tund - 90



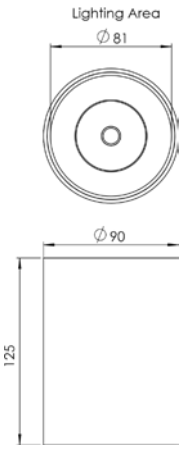


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tund - 100



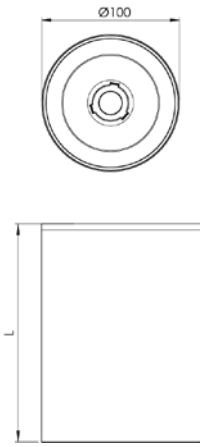

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1050 lm	105lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED


220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,40°,60° | FIXED | Class II | F | RAL


Lumen value is given according to 4000K value.

SPOT

Adjustable Surface Mounted

Bjara Duo S

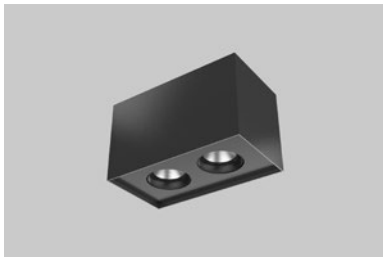

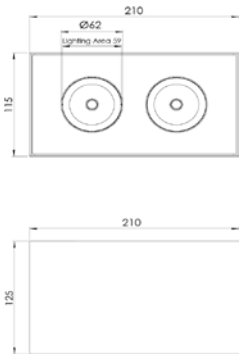


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
20 W	2700-3000-4000-5000-6500K	2069 lm	103lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2884 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 19° & 19° | Class I | F | RAL

Lumen value is given according to 4000K value.

Klen



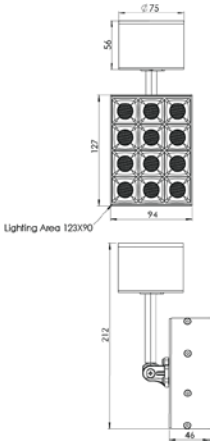


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
19 W	2700-3000-4000-5000-6500K	1900 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | ADJUSTABLE 350°- 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Omnia – 48



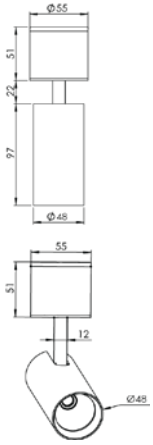


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED


220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350°- 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Omnia - 60








Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	1133 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED


220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350°- 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Omnia - 76








Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED


220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350°- 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Omnia - 80








Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2940 lm	105lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 24° ,40° ,60° | ADJUSTABLE 350°- 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Omnia - 100








Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350°- 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Solde – 2



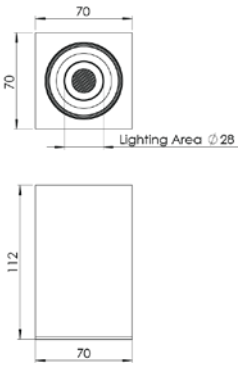


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	3000-4000-5000-6500K	200 lm	80lm/W	HP LED
5 W	3000-4000-5000-6500K	400 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 15° & 15° | Class I | F | RAL

Lumen value is given according to 3000K value.

Solde – 3





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	644 lm	92lm/W	HP LED


220 240 V~ | IP20 | CRI>80 CRI>90 | 10° ,25° ,40° ,60° | ADJUSTABLE 15° & 15° | Class I | F | RAL


Lumen value is given according to 2700K value.


SPOT


Trimless

Isen

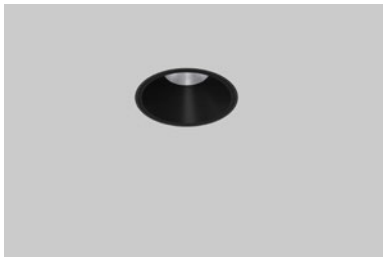







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,25°,38° | FIXED | Class II | F | RAL


Lumen value is given according to 4000K value.

SPOT

Trimless Adjustable

Alton



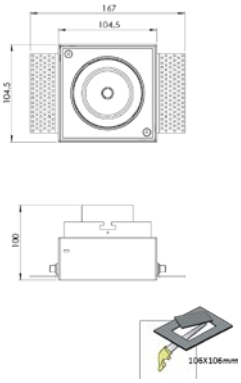



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Asto – T

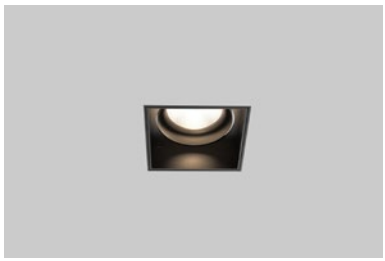





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36° | ADJUSTABLE 34° & 34° | Class II | F | RAL

Lumen value is given according to 4000K value.

Daro

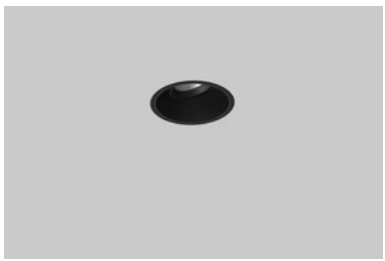

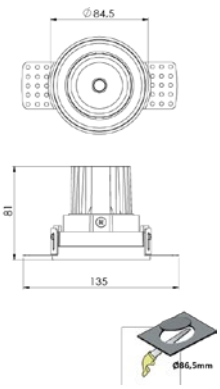



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	700 lm	100lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	900 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,25°,38° | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 4000K value.

Niva – 48 T

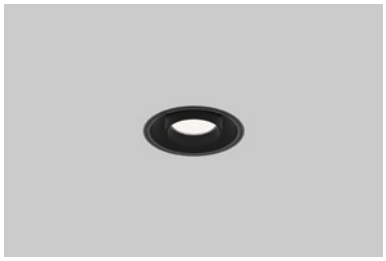

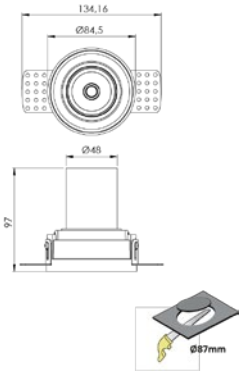


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1030 lm	103lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 18° & 18° | Class I | F | RAL

Lumen value is given according to 4000K value.

Niva – 48 T Long



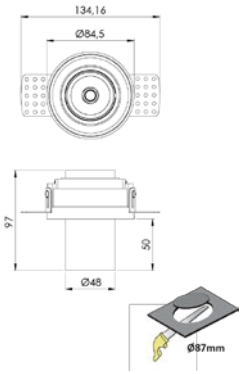


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1030 lm	103lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 18° & 18° | Class I | F | RAL

Lumen value is given according to 4000K value.

Oris – T



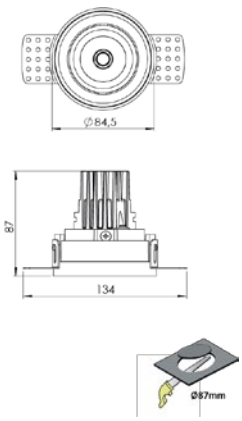


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1000 lm	100lm/W	COB LED
14 W	2700-3000-4000-5000-6500K	1400 lm	100lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	720 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 25° & 25° | Class II | F | RAL

Lumen value is given according to 4000K value.

Oris – 2 T



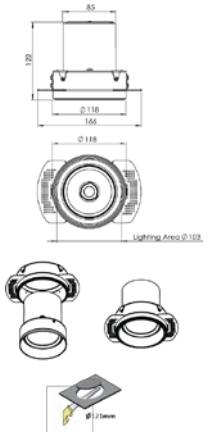


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
22 W	2700-3000-4000-5000-6500K	2306 lm	105lm/W	COB LED
24 W	2700-3000-4000-5000-6500K	2529 lm	105lm/W	COB LED
29,5 W	2700-3000-4000-5000-6500K	3100 lm	105lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 15° & 15° - 355° | Class II | F | RAL

Lumen value is given according to 4000K value.

Vesta



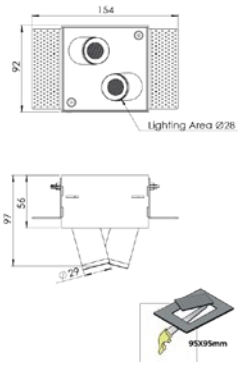

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
8 W	2700-3000-4000-5000-6500K	640 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 15° & 15° - 360° | Class II | F | RAL

Lumen value is given according to 3000K value.

SPOT

Pendant

Mirel 55





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Mirel 60





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Mirel 76






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Mirel 80



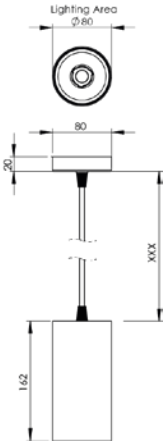

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>90 | 24° ,40° ,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Mirel 100







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Solde – 50 P

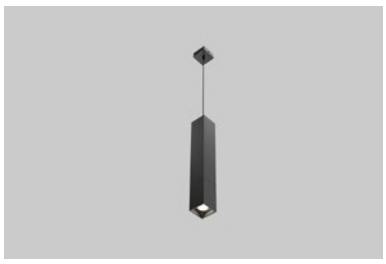




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED


220 240 V~ | IP20 | CRI>90 | 15° ,24° ,36° ,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

TRACKLIGHT

Aira

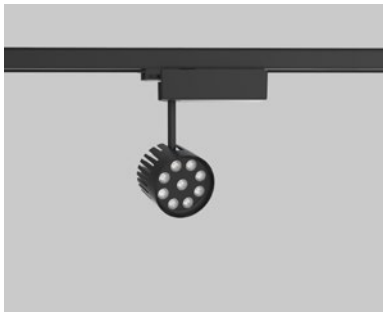




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2600 lm	130 lm/W	HP LED
28 W	2700-3000-4000-5000-6500K	3640 lm	130 lm/W	HP LED

220 V~ 240 V~ | IP40 | CRI>80 | 25°,40° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Arden – 6 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7,5 W	2700-3000-4000-5000-6500K	900 lm	120lm/W	HP LED
9,5 W	2700-3000-4000-5000-6500K	1140 lm	120lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

Arden – 12 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1680 lm	120lm/W	HP LED
19 W	2700-3000-4000-5000-6500K	2280 lm	120lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10X35° Elptc. | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

Elva - 48



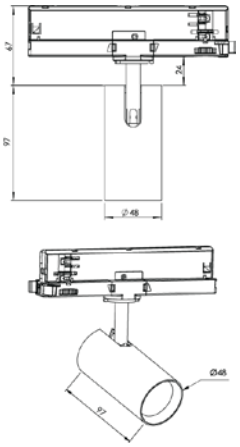


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
8 W	2700-3000-4000-5000-6500K	824 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Elva - 55



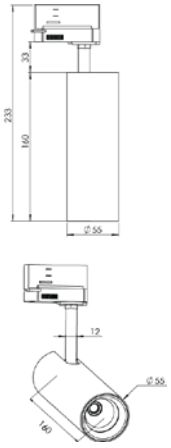



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Elva - 60

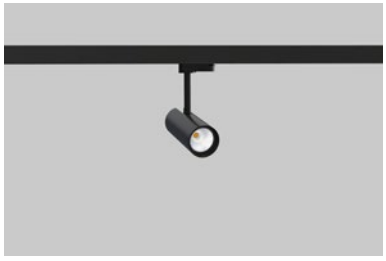




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	1133 lm	103lm/W	COB LED
7 W	2700-3000-4000-5000-6500K	721 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Elva - 76



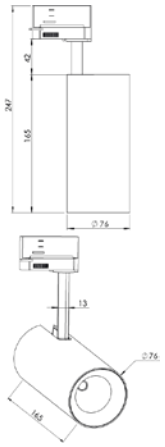


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm	103lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	927 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Elva - 80



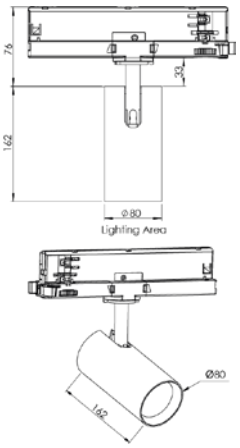


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105 lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105 lm/W	COB LED

220 240 V~ | IP20 | CRI>90 | 24° ,40° ,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Elva - 85



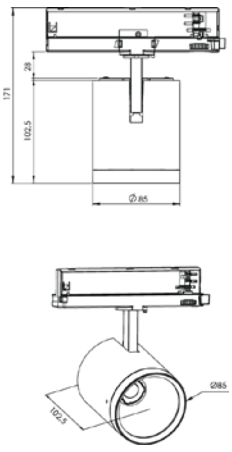


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
22 W	2700-3000-4000-5000-6500K	2310 lm	105 lm/W	COB LED
24 W	2700-3000-4000-5000-6500K	2520 lm	105 lm/W	COB LED
29,5 W	2700-3000-4000-5000-6500K	3098 lm	105 lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Elva - 85 Plus



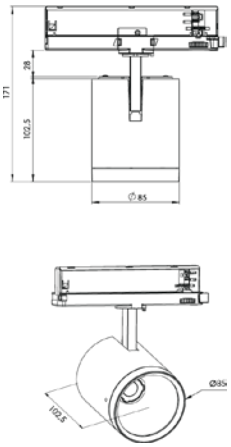


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
22 W	3000-3500-4000K	3080 lm	140lm/W	COB LED
24 W	3000-3500-4000K	3360 lm	140lm/W	COB LED
29,5 W	3000-3500-4000K	4130 lm	140lm/W	COB LED

220 240 V~ | IP20 | CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Elva - 100



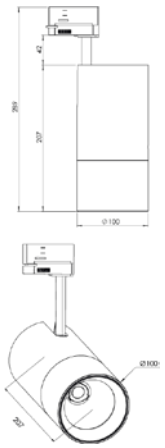



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Karo - 12

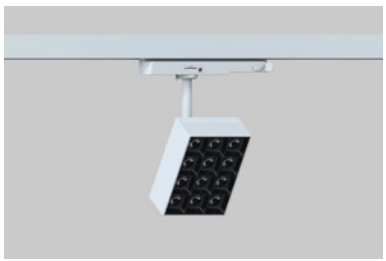

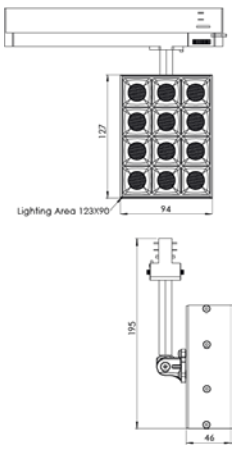



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
19 W	2700-3000-4000-5000-6500K	1900 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Karo - 24

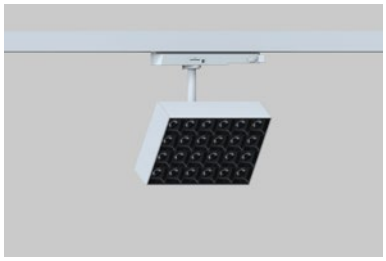




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
38 W	2700-3000-4000-5000-6500K	3800 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Lorne



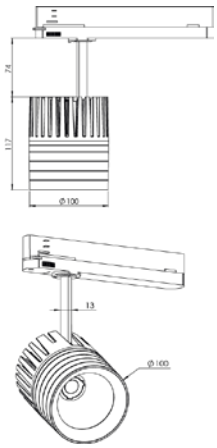


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2096 lm	105lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2950 lm	105lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3678 lm	105lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Lorne Bakery



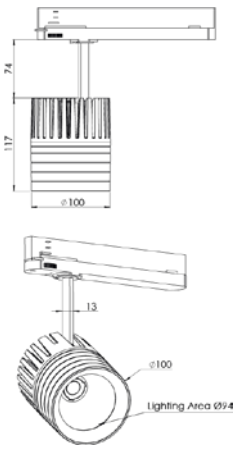


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	Enhanced whiteness and vividness	1620 lm	81 lm/W	COB LED
28 W	Enhanced whiteness and vividness	2268 lm	81 lm/W	COB LED
35 W	Enhanced whiteness and vividness	2835 lm	81 lm/W	COB LED

220 240 V~ | IP40 | CRI>90 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 2700K value.

Lorne Meat



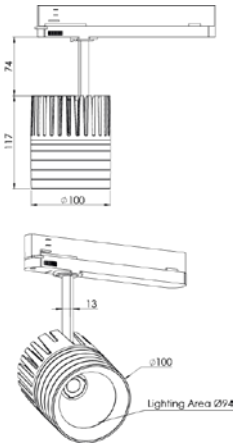


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	Vivid White & Red	1300 lm	65 lm/W	COB LED
28 W	Vivid White & Red	1820 lm	65 lm/W	COB LED
35 W	Vivid White & Red	2275 lm	65 lm/W	COB LED

220 240 V~ | IP40 | CRI>80 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

BaseOnLumenValue

Lorne Vegetable



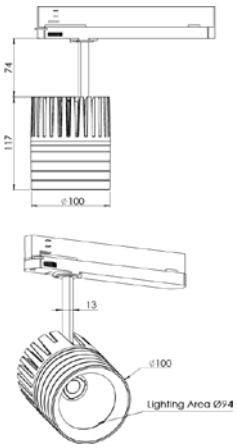


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	Vivid White, Green & Red	1700 lm	85 lm/W	COB LED
28 W	Vivid White, Green & Red	2380 lm	85 lm/W	COB LED
35 W	Vivid White, Green & Red	2975 lm	85 lm/W	COB LED

220 240 V~ | IP40 | CRI>80 | 15°,24°,40°,60° | ADJUSTABLE 350° - 90° | Class II | F | RAL

BaseOnLumenValue

Sova – 1 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1,7 W	2700-3000-4000-5000-6500K	157 lm	92lm/W	HP LED
2,2 W	2700-3000-4000-5000-6500K	203 lm	92lm/W	HP LED
3,1 W	2700-3000-4000-5000-6500K	286 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 2 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,7 W	2700-3000-4000-5000-6500K	249 lm	92lm/W	HP LED
3,7 W	2700-3000-4000-5000-6500K	341 lm	92lm/W	HP LED
5,2 W	2700-3000-4000-5000-6500K	479 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 3 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,8 W	2700-3000-4000-5000-6500K	350 lm	92lm/W	HP LED
5,3 W	2700-3000-4000-5000-6500K	488 lm	92lm/W	HP LED
7,5 W	2700-3000-4000-5000-6500K	690 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 4 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4,8 W	2700-3000-4000-5000-6500K	442 lm	92lm/W	HP LED
6,8 W	2700-3000-4000-5000-6500K	626 lm	92lm/W	HP LED
9,6 W	2700-3000-4000-5000-6500K	884 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 5 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W	2700-3000-4000-5000-6500K	1104 lm	92lm/W	HP LED
6 W	2700-3000-4000-5000-6500K	552 lm	92lm/W	HP LED
8,5 W	2700-3000-4000-5000-6500K	782 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 6 Track






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	920 lm	92lm/W	HP LED
14 W	2700-3000-4000-5000-6500K	1288 lm	92lm/W	HP LED
7 W	2700-3000-4000-5000-6500K	644 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 10 Track







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11,5 W	2700-3000-4000-5000-6500K	1058 lm	92lm/W	HP LED
16 W	2700-3000-4000-5000-6500K	1472 lm	92lm/W	HP LED
23 W	2700-3000-4000-5000-6500K	2116 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° | Class I | F | RAL

Lumen value is given according to 2700K value.

Tris - 24

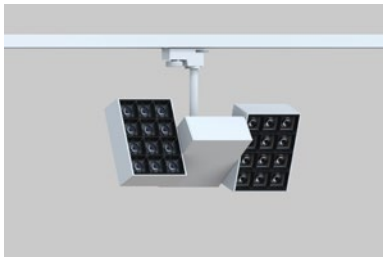





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
38 W	2700-3000-4000-5000-6500K	3800 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Tris - 48

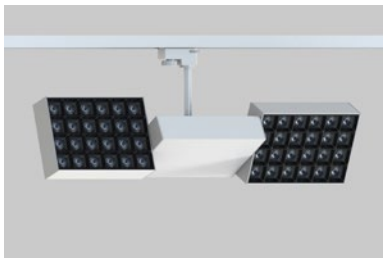




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
76W	2700-3000-4000-5000-6500K	7600 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | ADJUSTABLE 350° - 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Velor



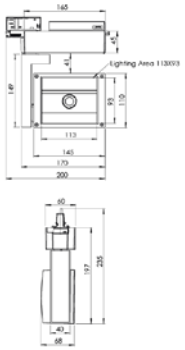



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2000 lm	100lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2800 lm	100lm/W	COB LED
35 W	2700-3000-4000-5000-6500K	3500 lm	100lm/W	COB LED

220 240 V~ | IP40 | CRI>80 CRI>90 | ASYM. | ADJUSTABLE 340° - 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Recessed Track System

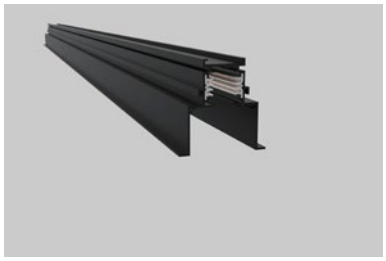





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source

F RAL

Three Phase Track – S

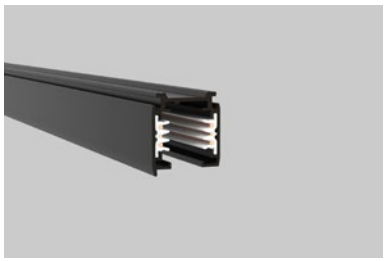




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source

F RAL

Three Phase Track – R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source

F RAL

Monophase Track – S





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source

F


RAL


BaseOnLumenValue

LINEAR

Recessed Mounted

Elaro

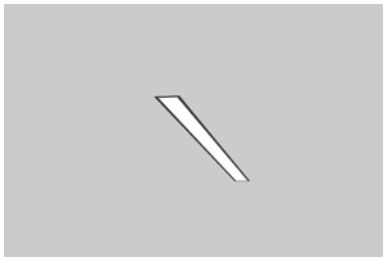




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	2275 lm	65lm/W	MP LED
47 W	2700-3000-4000-5000-6500K	3250 lm	65lm/W	MP LED

220 240 V~ | IP20 | CRI>80 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Rumo - R







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	1435 lm	41lm/W	MP LED
70 W	2700-3000-4000-5000-6500K	2870 lm	41lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Sova – 1 R

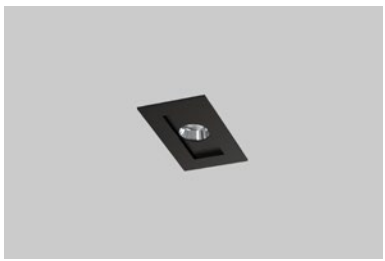




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1,7 W	2700-3000-4000-5000-6500K	157 lm	92lm/W	HP LED
2,2 W	2700-3000-4000-5000-6500K	203 lm	92lm/W	HP LED
3,1 W	2700-3000-4000-5000-6500K	286 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 2 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,7 W	2700-3000-4000-5000-6500K	249 lm	92lm/W	HP LED
3,7 W	2700-3000-4000-5000-6500K	341 lm	92lm/W	HP LED
5,2 W	2700-3000-4000-5000-6500K	479 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 3 R







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,8 W	2700-3000-4000-5000-6500K	350 lm	92lm/W	HP LED
5,3 W	2700-3000-4000-5000-6500K	488 lm	92lm/W	HP LED
7,5 W	2700-3000-4000-5000-6500K	690 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 4 R

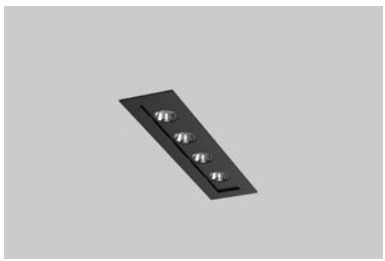





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4,8 W	2700-3000-4000-5000-6500K	442 lm	92lm/W	HP LED
6,8 W	2700-3000-4000-5000-6500K	626 lm	92lm/W	HP LED
9,6 W	2700-3000-4000-5000-6500K	884 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 5 R

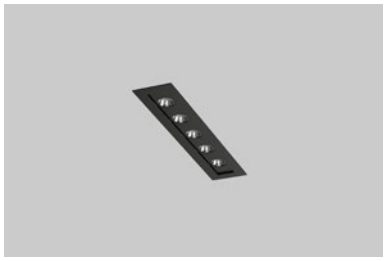





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W	2700-3000-4000-5000-6500K	1104 lm	92lm/W	HP LED
6 W	2700-3000-4000-5000-6500K	552 lm	92lm/W	HP LED
8,5 W	2700-3000-4000-5000-6500K	782 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 6 R

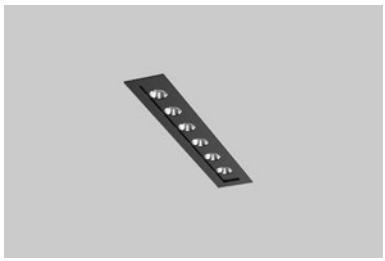





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	920 lm	92lm/W	HP LED
14 W	2700-3000-4000-5000-6500K	1288 lm	92lm/W	HP LED
7 W	2700-3000-4000-5000-6500K	644 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Tirra

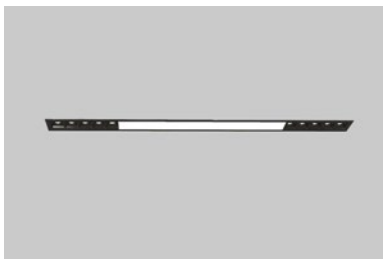





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
28 W	2700-3000-4000-5000-6500K	2044 lm	73 lm/W	HP LED/ MP LED

220 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10 X 35° Elptc. | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Tivra – 2 R

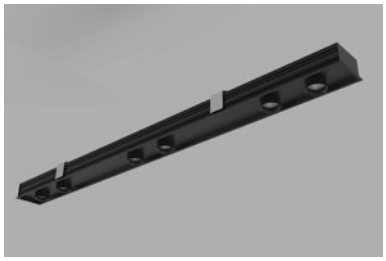




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6×11 W	2700-3000-4000-5000-6500K	6798 lm	103lm/W	COB LED
6×7 W	2700-3000-4000-5000-6500K	4326 lm	103lm/W	COB LED
6×9 W	2700-3000-4000-5000-6500K	5562 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 10°, 25°, 40°, 60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Tivra – 3 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6×5W	2700-3000-4000-5000-6500K	3060 lm	102lm/W	HP LED
6×7 W	2700-3000-4000-5000-6500K	4284 lm	102lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°, 25°, 40°, 60° | ADJUSTABLE 21° & 21° | Class I | F | RAL

Lumen value is given according to 3000K value.

Tivra – 4 R






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4×14 W	2700-3000-4000-5000-6500K	5768 lm	103lm/W	COB LED
4×7 W	2700-3000-4000-5000-6500K	2884 lm	103lm/W	COB LED
4×9 W	2700-3000-4000-5000-6500K	3708 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°, 24°, 36°, 60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Volin




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	2275 lm	65lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Volin Mix – 1





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
41 W	2700-3000-4000-5000-6500K	3684 lm	90lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL


Lumen value is given according to 4000K value.

LINEAR

Adjustable Recessed Mounted

Arden – 5 RA







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W	2700-3000-4000-5000-6500K	1440 lm	120lm/W	HP LED
6 W	2700-3000-4000-5000-6500K	720 lm	120lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | ADJUSTABLE 30° & 30° | Class II | F | RAL

Lumen value is given according to 3000K value.

Arden – 10 RA

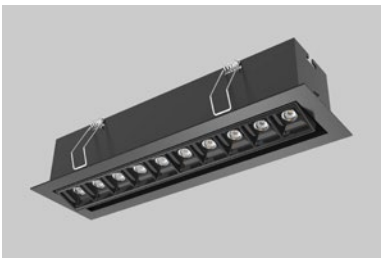



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
17 W	2700-3000-4000-5000-6500K	2040 lm	120lm/W	HP LED
23 W	2700-3000-4000-5000-6500K	2760 lm	120lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10×35° Elptc. | ADJUSTABLE 30° & 30° | Class II | F | RAL


Lumen value is given according to 3000K value.

LINEAR

Surface Mounted

Kendo – 1 S







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
15 W	2700-3000-4000-5000-6500K	1638 lm	109 lm/W, 91 lm/W	HP LED
30 W	2700-3000-4000-5000-6500K	2730 lm	109 lm/W, 91 lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 15° & 15° | Class I | F | RAL

Lumen value is given according to 4000K value.

Kendo – 2 S

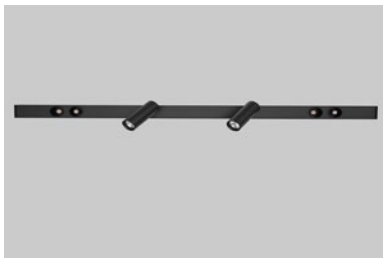





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
24 W	2700-3000-4000-5000-6500K	2534 lm	105.5 lm/W - 96.5 lm/W	HP LED/ COB LED
38 W	2700-3000-4000-5000-6500K	3674 lm	105.5 lm/W - 96.5 lm/W	HP LED/ COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 10°,25°,40°,60° | ADJUSTABLE 350° - 90° + 15° & 15° | Class I | F | RAL

Lumen value is given according to 4000K value.

Mysa Midi – S

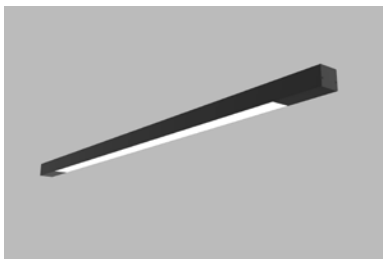





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	2275 lm	65lm/W	MP LED
50 W	2700-3000-4000-5000-6500K	3250 lm	65lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Mysa Mini – S

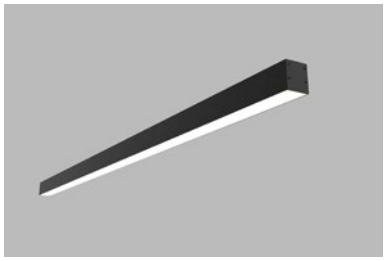





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
22 W	2700-3000-4000-5000-6500K	1650 lm	75lm/W	MP LED
31 W	2700-3000-4000-5000-6500K	2325 lm	75lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Solin

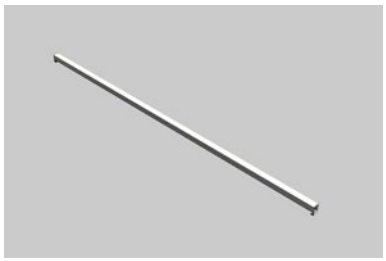





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
17 W	2700-3000-4000-5000-6500K	1275 lm	75lm/W	MP LED
25 W	2700-3000-4000-5000-6500K	1875 lm	75lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | ADJUSTABLE 90° & 90° | Class II | F | RAL

Lumen value is given according to 4000K value.

Sova – 1 S

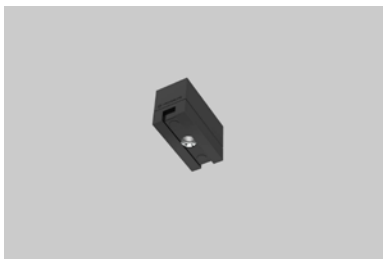

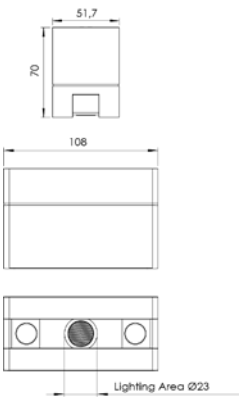



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1,7 W	2700-3000-4000-5000-6500K	157 lm	92lm/W	HP LED
2,2 W	2700-3000-4000-5000-6500K	203 lm	92lm/W	HP LED
3,1 W	2700-3000-4000-5000-6500K	286 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 2 S

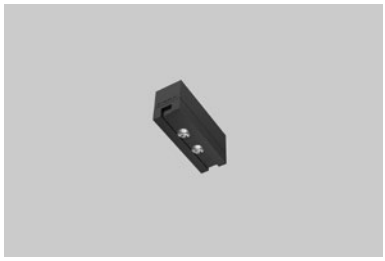




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,7W	2700-3000-4000-5000-6500K	249 lm	92lm/W	HP LED
3,7 W	2700-3000-4000-5000-6500K	341 lm	92lm/W	HP LED
5,2 W	2700-3000-4000-5000-6500K	479 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 3 S






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,8 W	2700-3000-4000-5000-6500K	350 lm	92lm/W	HP LED
5,3 W	2700-3000-4000-5000-6500K	488 lm	92lm/W	HP LED
7,5 W	2700-3000-4000-5000-6500K	690 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 4 S






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4,8 W	2700-3000-4000-5000-6500K	442 lm	92lm/W	HP LED
6,8 W	2700-3000-4000-5000-6500K	626 lm	92lm/W	HP LED
9,6 W	2700-3000-4000-5000-6500K	884 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 5 S






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W	2700-3000-4000-5000-6500K	1104 lm	92lm/W	HP LED
6 W	2700-3000-4000-5000-6500K	552 lm	92lm/W	HP LED
8,5 W	2700-3000-4000-5000-6500K	782 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Sova – 6 S





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	920 lm	92lm/W	HP LED
14 W	2700-3000-4000-5000-6500K	1288 lm	92lm/W	HP LED
7 W	2700-3000-4000-5000-6500K	644 lm	92lm/W	HP LED


220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL


Lumen value is given according to 2700K value.

LINEAR

Trimless

Rell - L

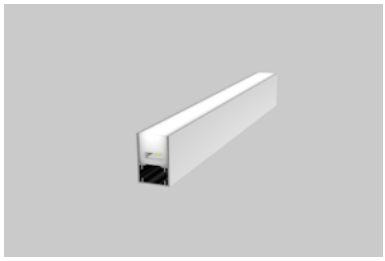

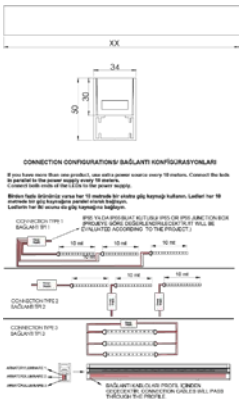


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/Mt	2700-3000-4000-5000-6500K	280 lm/mt	20 lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Rell





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/Mt	2700-3000-4000-5000-6500K	364 lm/mt	26lm/W	MP LED


220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class III | F | RAL


Lumen value is given according to 3000K value.

LINEAR

Pendant

Bruna

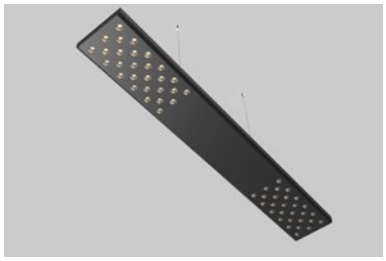




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
33 W	2700-3000-4000-5000-6500K	3036 lm	92lm/W	HP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Bruna – 2







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
18 W	2700-3000-4000-5000-6500K	1749 lm	97lm/W	MP LED
25 W	2700-3000-4000-5000-6500K	2425 lm	97lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Bruna – 2 Indirect

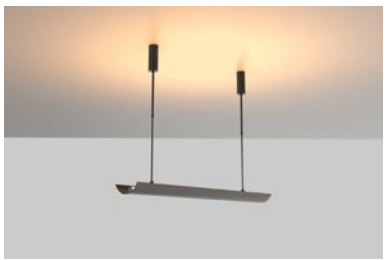





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
18 W	2700-3000-4000-5000-6500K	1746 lm	97lm/W	MP LED
25 W	2700-3000-4000-5000-6500K	2425 lm	97lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Ivar

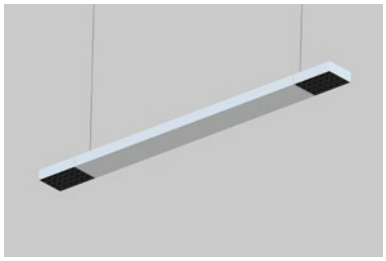





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
76 W	2700-3000-4000-5000-6500K	7600 lm	100lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 25°,40° | ADJUSTABLE 90° & 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Kendo – 2 P

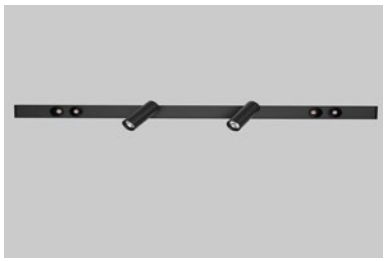

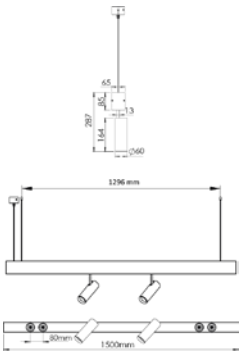


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
24 W	2700-3000-4000-5000-6500K	2534 lm	105.5 lm/W - 96.5 lm/W	HP LED/ COB LED
38 W	2700-3000-4000-5000-6500K	3674 lm	105.5 lm/W - 96.5 lm/W	HP LED/ COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | ADJUSTABLE 350° - 90° + 15° & 15° | Class I | F | RAL

Lumen value is given according to 4000K value.

Lesto







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2400 lm	120 lm/W	HP LED
28 W	2700-3000-4000-5000-6500K	3360 lm	120 lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10X35° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Mysa

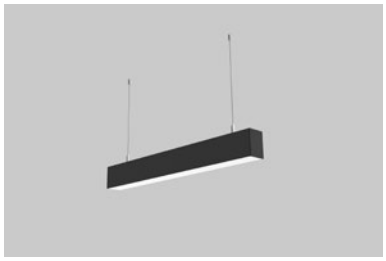





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	2275 lm	65 lm/W	MP LED
48 W	2700-3000-4000-5000-6500K	3120 lm	65 lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Mysa Direct Indirect

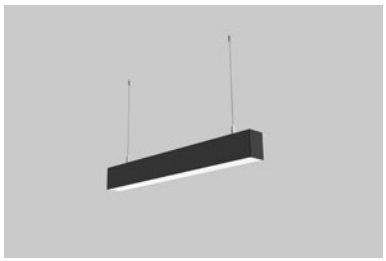




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
60 W	2700-3000-4000-5000-6500K	3900 lm	65lm/W	MP LED
73 W	2700-3000-4000-5000-6500K	4745 lm	65lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Oriva






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
40 W	2700-3000-4000-5000-6500K	4080 lm	102lm/W	MP LED
60 W	2700-3000-4000-5000-6500K	6120 lm	102lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Rumo

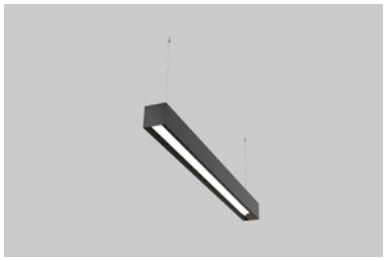





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	1435 lm	41lm/W	MP LED
70 W	2700-3000-4000-5000-6500K	2870 lm	41lm/W	MP LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Rumo Direct Indirect

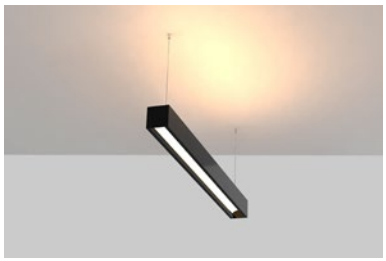




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
57 W	2700-3000-4000-5000-6500K	4047 lm	71lm/W	MP LED
92 W	2700-3000-4000-5000-6500K	6532 lm	71lm/W	MP LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Sova P







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	3220 lm	92lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 10° ,25° ,40° ,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Tivra – 2 P

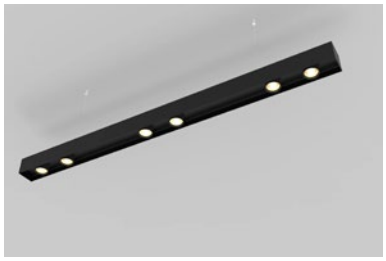




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6×11 W	2700-3000-4000-5000-6500K	6798 lm	103lm/W	COB LED
6×7 W	2700-3000-4000-5000-6500K	4326 lm	103lm/W	COB LED
6×9 W	2700-3000-4000-5000-6500K	5562 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°, 24°, 36°, 60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Tivra – 3 P






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6×5 W	2700-3000-4000-5000-6500K	3060 lm	102lm/W	HP LED
6×7 W	2700-3000-4000-5000-6500K	4284 lm	102lm/W	HP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°, 24°, 36°, 60° | ADJUSTABLE 21° & 21° | Class I | F | RAL

Lumen value is given according to 3000K value.

Tivra – 4 P






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4×14 W	2700-3000-4000-5000-6500K	5768 lm	103lm/W	COB LED
4×7 W	2700-3000-4000-5000-6500K	2884 lm	103lm/W	COB LED
4×9 W	2700-3000-4000-5000-6500K	3708 lm	103lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°, 24°, 36°, 60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Tivra – 5 P







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
32 W	2700-3000-4000-5000-6500K	2612 lm	82lm/W	MP LED/ COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60°,120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Viora

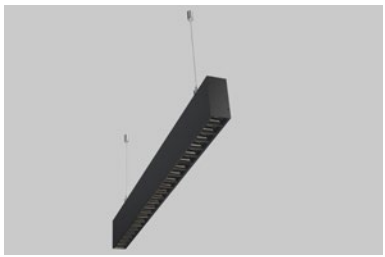




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
25 W	2700-3000-4000-5000-6500K	3000 lm	120 lm/W	HP LED
35 W	2700-3000-4000-5000-6500K	4200 lm	120 lm/W	HP LED


220 240 V~ | IP20 | CRI>80 | 12°,36°,48°,10X35° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

DECORATIVE

Asteron

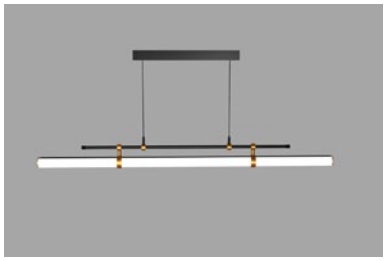





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
25 W	2700-3000-4000-5000-6500K	2425 lm	97lm/W	MP LED
35 W	2700-3000-4000-5000-6500K	3395 lm	97lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Corda – 60

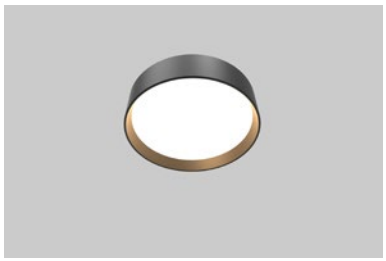




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
40 W	2700-3000-4000-5000-6500K	2120 lm	90lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 35° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Corda – 60 Direct-Indirect



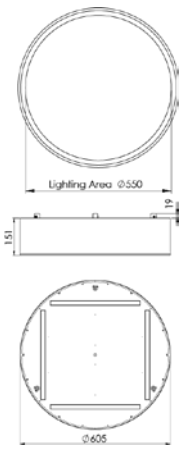


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
58 W	2700-3000-4000-5000-6500K	2120 lm	37lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Fino







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
18 W	2700-3000-4000-5000-6500K	954 lm	53lm/W	MP LED
35 W	2700-3000-4000-5000-6500K	1855 lm	53lm/W	MP LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 35° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Hex Mega Trio

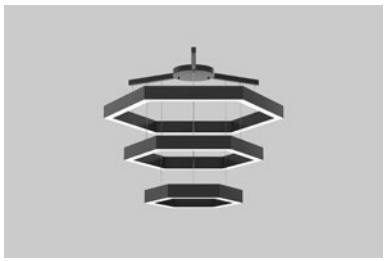

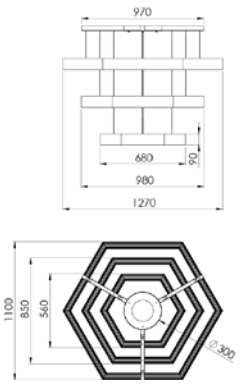


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
249 W	2700-3000-4000-5000-6500K	16485 lm	65lm/W	MP LED

220 V~ 240 V~ | IP20 | CRI>80 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Hex Mini Trio



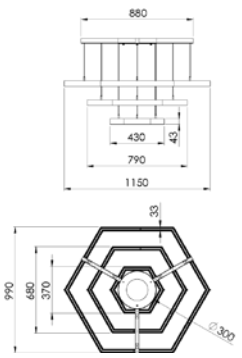

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
168 W	2700-3000-4000-5000-6500K	12600 lm	75lm/W	MP LED

220 V~ 240 V~ | IP20 | CRI>80 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Lavia






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
20 W	2700-3000-4000-5000-6500K	2000 lm	100lm/W	COB LED
28 W	2700-3000-4000-5000-6500K	2800 lm	100lm/W	COB LED

220 240 V~ | IP20 | CRI>90 | 15° ,24° ,36° ,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Lunet Barisol






Projeye göre istenilen ölçülerde imal edilebilir.
It can be manufactured in desired dimensions according to the project.


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
55 W/m2	2500K	1925 lm	35lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 110° | FIXED | Class I | F | RAL

Lumen value is given according to 2500K value.

Luro - 40

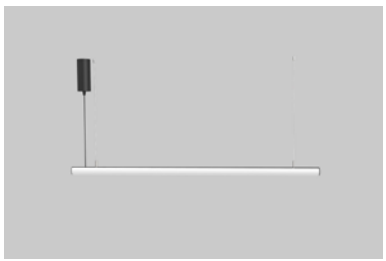





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
25 W	2700-3000-4000-5000-6500K	2425 lm	97lm/W	MP LED
30 W	2700-3000-4000-5000-6500K	2910 lm	97lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Luro - 80

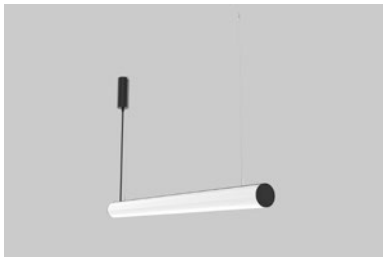




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
30 W	2700-3000-4000-5000-6500K	3330 lm	111lm/W	MP LED
38 W	2700-3000-4000-5000-6500K	4218 lm	111lm/W	MP LED
50 W	2700-3000-4000-5000-6500K	5550 lm	111lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Noma






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/mt	3000K	1008 lm/mt	72lm/W	MP LED

220 240 V~ | IP54 | CRI>80 | 360° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Noma – 2







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/mt	3000K	1009 lm/mt	72lm/W	MP LED

220 240 V~ | IP54 | CRI>80 | 360° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Noma – 3

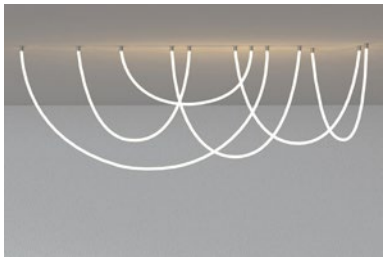




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/mt	3000K	1008 lm/mt	72lm/W	MP LED

220 240 V~ | IP54 | CRI>80 | 360° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Noma – 4






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/mt	3000K	1008 lm/mt	72lm/W	MP LED

220 240 V~ | IP54 | CRI>80 | 360° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Noma – 5






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W/mt	3000K	1008 lm/mt	72lm/W	MP LED

220 240 V~ | IP54 | CRI>80 | 360° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Nuvea-1



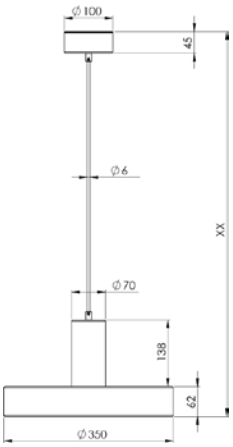


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
17 W	3000K	935 lm	55lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Nuvea-2






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
17 W	3000K	935 lm	55lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Nuvea-3



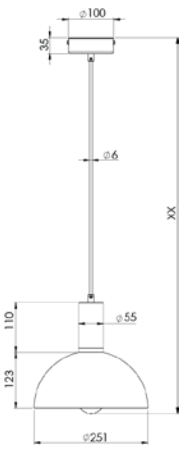


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	3000K	498 lm	83lm/W	E27 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Nuvea-4



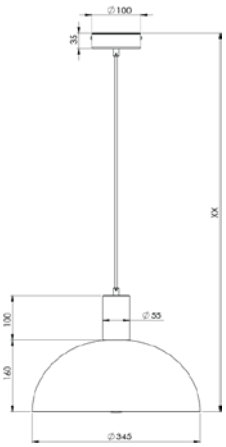


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	2500K	528 lm	88lm/W	G95-E27 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 2500K value.

Panel






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
15 W	2700-3000-4000-5000-6500K	1470 lm	98lm/W	MP LED
24 W	2700-3000-4000-5000-6500K	2352 lm	98lm/W	MP LED
35 W	2700-3000-4000-5000-6500K	3430 lm	98lm/W	MP LED
45 W	2700-3000-4000-5000-6500K	4410 lm	98lm/W	MP LED

220 240 V~ | IP40, IP44 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Skye – Dec



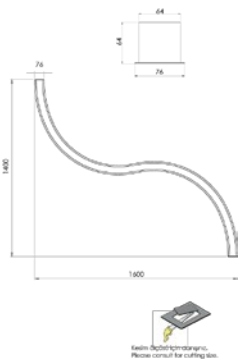


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
58 W	2700-3000-4000-5000-6500K	3300 lm	57 lm/W	MP LED

220 240 V~ | IP20 | CRI>80 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Stellon



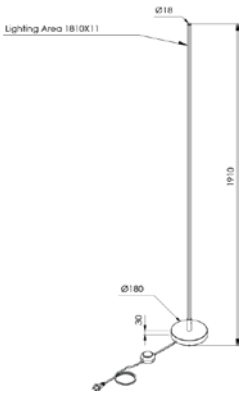


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10,5 W	2700-3000-4000-5000-6500K	525 lm	50 lm/W	MP LED
6,5 W	2700-3000-4000-5000-6500K	325 lm	50 lm/W	MP LED
8,5 W	2700-3000-4000-5000-6500K	425 lm	50 lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 100° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Tella



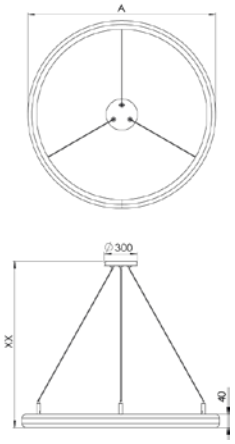


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
27 W	2700-3000-4000-5000-6500K	1196 lm	45lm/W	MP LED
40 W	2700-3000-4000-5000-6500K	1772 lm	45lm/W	MP LED
55 W	2700-3000-4000-5000-6500K	2437 lm	45lm/W	MP LED

220 240 V~ | IP20 | CRI>80 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tella Duo



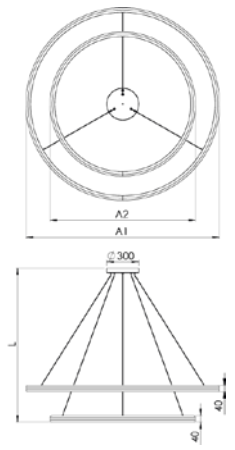


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
67 W	2700-3000-4000-5000-6500K	2968 lm	45lm/W	MP LED
95 W	2700-3000-4000-5000-6500K	4209 lm	45lm/W	MP LED

220 240 V~ | IP20 | CRI>80 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tella Trio



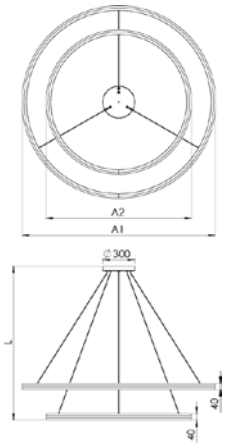



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
122 W	2700-3000-4000-5000-6500K	5405 lm	45lm/W	MP LED

220 240 V~	IP20	CRI>80	19°,38°	FIXED	Class II	F	RAL

Lumen value is given according to 4000K value.

Varna

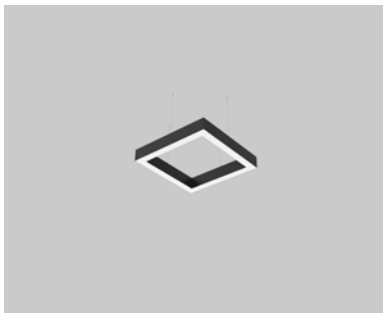




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
70 W	2700-3000-4000-5000-6500K	4550 lm	65 lm/W	MP LED
95 W	2700-3000-4000-5000-6500K	6175 lm	65 lm/W	MP LED

220 240 V~	IP20	CRI>80 CRI>90	120°	FIXED	Class II	F	RAL

Lumen value is given according to 4000K value.

Varo







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
42 W	2700-3000-4000-5000-6500K	4326 lm	103lm/W	COB LED
54 W	2700-3000-4000-5000-6500K	5562 lm	103lm/W	COB LED

220 240 V~	IP40	CRI>80 CRI>90	15°,24°,36°,60°	ADJUSTABLE 350° - 90°	Cass I	F	RAL

Lumen value is given according to 3000K value.

Velora

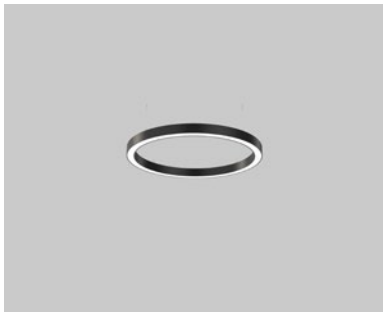



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	1995 lm	57 lm/W	MP LED
55 W	2700-3000-4000-5000-6500K	3135 lm	57 lm/W	MP LED
80 W	2700-3000-4000-5000-6500K	4560 lm	57 lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL


Lumen value is given according to 4000K value.

APLIQUE

Recessed Mounted

Eron – 1











Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
MAX 10W(LED)	2700-3000-4000-5000-6500K			GU10(HALOGEN/LED
MAX 50W(HALOGEN)	2700-3000-4000-5000-6500K			GU10(HALOGEN/LED

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

BaseOnLumenValue

Malin

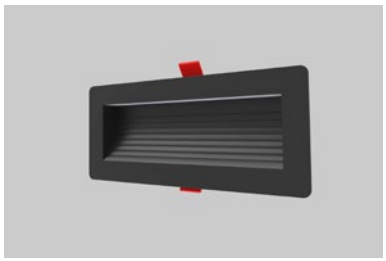




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	135 lm	27 lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Siva – 4 R





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	2700-3000-4000-5000-6500K	200 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 330° - 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

APLIQUE

Surface Mounted

Arden – 12 Applique







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1680 lm	120lm/W	HPLED
19 W	2700-3000-4000-5000-6500K	2280 lm	120lm/W	HPLED

220 240 V~ | IP20 | CRI>80 | 12°,36°,48°10X35° Elptc | ADJUSTABLE 90° & 90° | Class II | F | RAL

Lumen value is given according to 3000K value.

Arlo

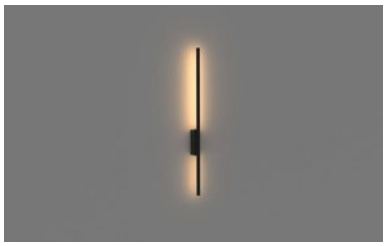





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4,8 W	2700-3000-4000-5000-6500K	240 lm	50lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 100° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Arlo – 2

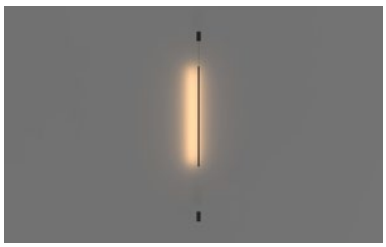

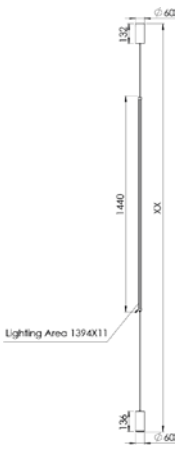


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
13 W	2700-3000-4000-5000-6500K	650 lm	50lm/W	MP LED
19 W	2700-3000-4000-5000-6500K	950 lm	50lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 100° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Arlo – 3



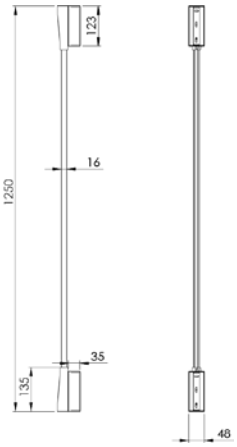



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
16 W	2700-3000-4000-5000-6500K	800 lm	50lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 100° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Duna

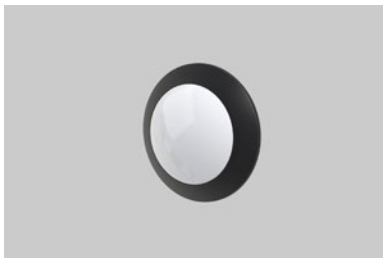

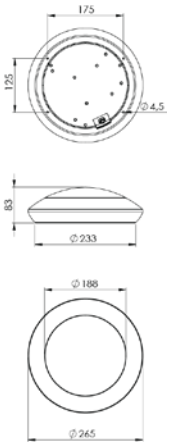


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
16,5 W	2700-3000-4000-5000-6500K	1650 lm	100lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 115° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Duna – 2







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
16 W	2700-3000-4000-5000-6500K	1808 lm	113lm/W	MP LED

220 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Elora

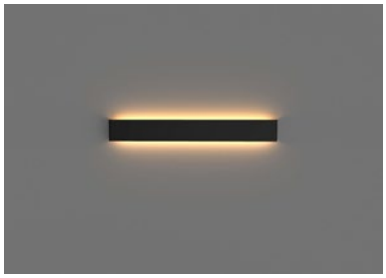





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
16,5 W	2700-3000-4000-5000-6500K	1155 lm	70lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kavia

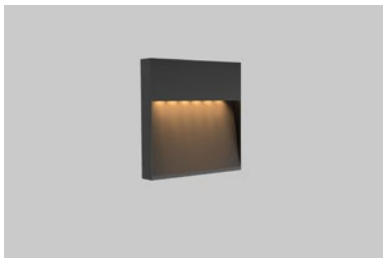





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	360 lm	72lm/W	HPLED

220 240 V~ | IP20 | CRI>80 CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Kayla

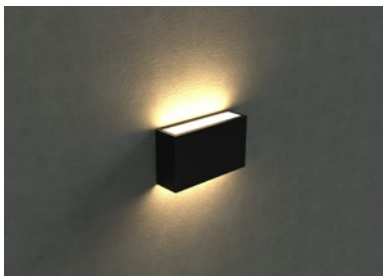




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
9,5 W	2700-3000-4000-5000-6500K	380 lm	40lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kayla – 2






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
9 W	2700-3000-4000-5000-6500K	810 lm	90lm/W	E-27 LED LAMP

220 240 V~ | IP20 | CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kayla – 3



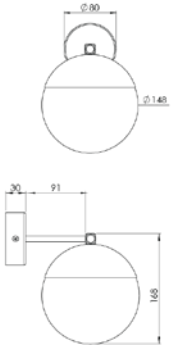


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	3000K	806 lm	115lm/W	E-14 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kayla – 4






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	2700K	470 lm	78lm/W	E-14 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Liven







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	250 lm	50lm/W	MP LED
7 W	2700-3000-4000-5000-6500K	350 lm	50lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 100° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

Liven – 2

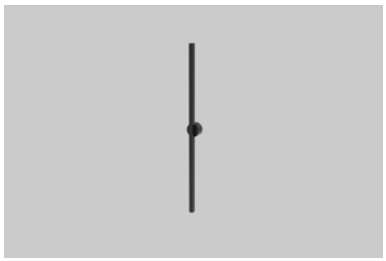




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	375 lm	75lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 110° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Marn






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,2 W	2700-3000-4000-5000-6500K	110 lm	50lm/W	MP LED
5 W	2700-3000-4000-5000-6500K	250 lm	50lm/W	MP LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 100° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Nerisca







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2 W	2700-3000-4000-5000-6500K	160 lm	80lm/W	E14 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Nerisca – 4

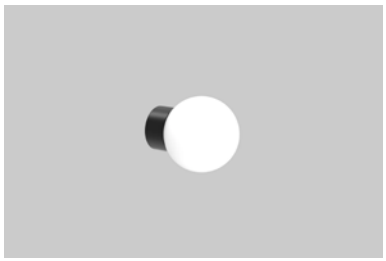

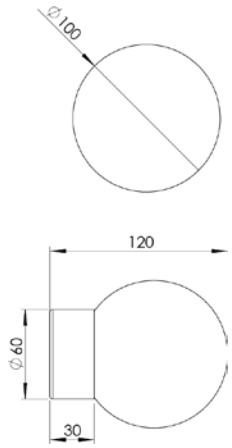


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1,7 W	3000K	260 lm	153lm/W	G9 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Ovia – 2






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	2500K	528 lm	88lm/W	E27 RUSTİK

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class II | F | RAL

Lumen value is given according to 2500K value.

Pavo – 60 Wood






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
9 W	3000K	700 lm	78lm/W	GU10 LED LAMP

220 240 V~ | IP20 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Sento







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
17 W	2700-3000-4000-5000-6500K	1309 lm	77lm/W	HPLED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 2700K value.

Siva

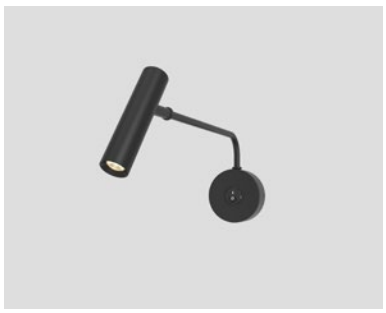




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	2700-3000-4000-5000-6500K	200 lm	80lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	400 lm	80lm/W	HP LED

220 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Siva – 4







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	400 lm	80lm/W	HP LED

220 V~ 240 V~ | IP20 | CRI>80 | 10°,25°,40°,60° | ADJUSTABLE 330° - 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

Solen – 40 S

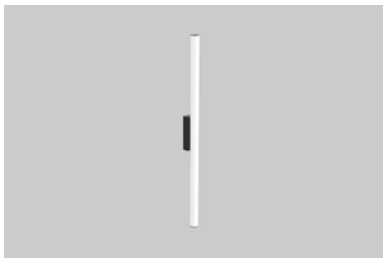

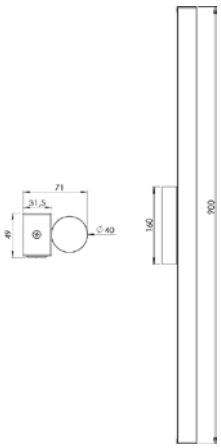



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1358 lm	97lm/W	MP LED

220 V~ 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Solen – 80 S

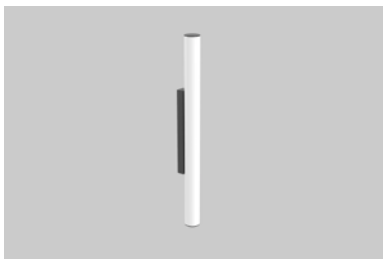

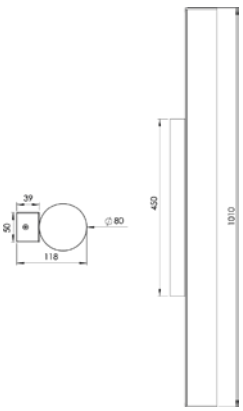



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
33 W	2700-3000-4000-5000-6500K	3201 lm	97lm/W	MP LED

220 V~ 240 V~ | IP40 | CRI>80 CRI>90 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Tovin

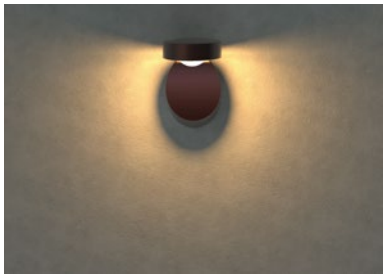




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	216 lm	72lm/W	COB LED
5 W	2700-3000-4000-5000-6500K	360 lm	72lm/W	COB LED

220 240 V~ | IP20 | CRI>80 CRI>90 | 60° | ADJUSTABLE 355° - 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

Trona – 1 S







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11,5 W	2700-3000-4000-5000-6500K	1035 lm	90lm/W	MP LED
5,5 W	2700-3000-4000-5000-6500K	495 lm	90lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 132° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Trona – 2 S

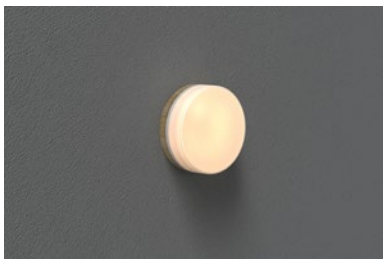





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	900 lm	90lm/W	MP LED
14 W	2700-3000-4000-5000-6500K	1260 lm	90lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 132° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Trona – 3 S

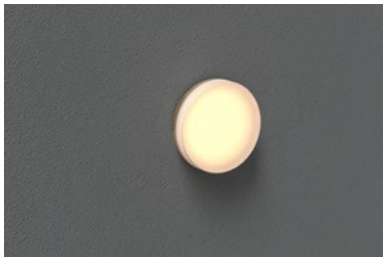





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
18 W	2700-3000-4000-5000-6500K	1620 lm	90lm/W	MP LED
25 W	2700-3000-4000-5000-6500K	2250 lm	90lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 132° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Trona – 4 S

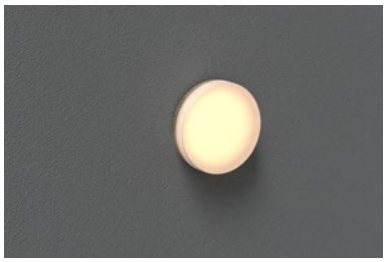





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
30 W	2700-3000-4000-5000-6500K	2700 lm	90lm/W	MP LED

220 240 V~ | IP20 | CRI>90 | 132° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Vaska

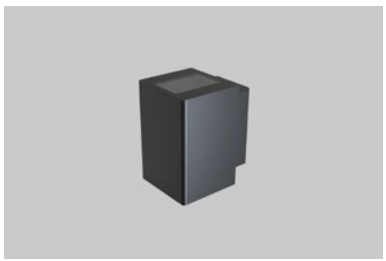




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	105 lm	15lm/W	HPLED


220 240 V~ | IP20 | CRI>80 | 10°,40° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

COVE LIGHTING

Arden Corner

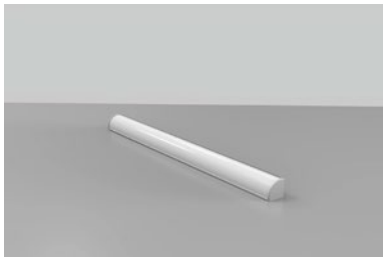




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W/mt	2700-3000-4000-5000-6500K	936 lm/mt	78lm/W	MP LED
14 W/mt	2700-3000-4000-5000-6500K	1092 lm/mt	78lm/W	MP LED
17 W/mt	2700-3000-4000-5000-6500K	1326 lm/mt	78lm/W	MP LED
7 W/mt	2700-3000-4000-5000-6500K	546 lm/mt	78lm/W	MP LED

220 240 V~ | IP20, IP44 | CRI>80 | 120° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Arden Opaque







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W/mt	2700-3000-4000-5000-6500K	936 lm/mt	78lm/W	MP LED
14 W/mt	2700-3000-4000-5000-6500K	1092 lm/mt	78lm/W	MP LED
17 W/mt	2700-3000-4000-5000-6500K	1326 lm/mt	78lm/W	MP LED
7 W/mt	2700-3000-4000-5000-6500K	546 lm/mt	78lm/W	MP LED

220 240 V~ | IP20, IP44 | CRI>80 | 120° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Arden Opaque Flat

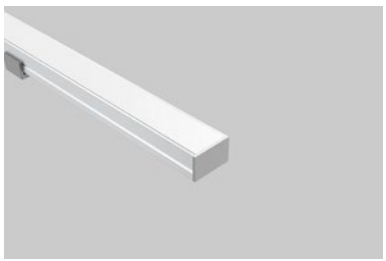




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W/mt	2700-3000-4000-5000-6500K	936 lm/mt	78lm/W	MP LED
14 W/mt	2700-3000-4000-5000-6500K	1092 lm/mt	78lm/W	MP LED
17 W/mt	2700-3000-4000-5000-6500K	1326 lm/mt	78lm/W	MP LED
7 W/mt	2700-3000-4000-5000-6500K	546 lm/mt	78lm/W	MP LED

220 240 V~ | IP20, IP44 | CRI>80 | 120° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Arden Transparent







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W/mt	2700-3000-4000-5000-6500K	936 lm/mt	78lm/W	MP LED
14 W/mt	2700-3000-4000-5000-6500K	1092 lm/mt	78lm/W	MP LED
17 W/mt	2700-3000-4000-5000-6500K	1326 lm/mt	78lm/W	MP LED
7 W/mt	2700-3000-4000-5000-6500K	546 lm/mt	78lm/W	MP LED

220 240 V~ | IP20, IP44 | CRI>80 | 120° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Arden Transparent Flat

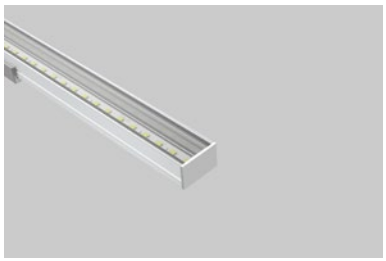





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W/mt	2700-3000-4000-5000-6500K	1200 lm/mt	100lm/W	MP LED
14 W/mt	2700-3000-4000-5000-6500K	1400 lm/mt	100lm/W	MP LED
17 W/mt	2700-3000-4000-5000-6500K	1700 lm/mt	100lm/W	MP LED
7 W/mt	2700-3000-4000-5000-6500K	700 lm/mt	100lm/W	MP LED

220 240 V~ | IP20, IP44 | CRI>80 | 120° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Asimo

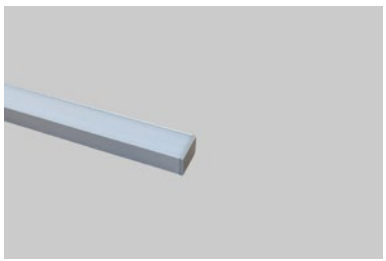




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
12 W/mt	2700-3000-4000-5000-6500K	936 lm/mt	78lm/W	MP LED
14 W/mt	2700-3000-4000-5000-6500K	1092 lm/mt	78lm/W	MP LED
7 W/mt	2700-3000-4000-5000-6500K	546 lm/mt	78lm/W	MP LED


220 240 V~ | IP20, IP44 | CRI>80 | 120° | FIXED | Class II | F | RAL

Lumen value is given according to 3000K value.

PARKING LOT LUMINAIRES

Aveno

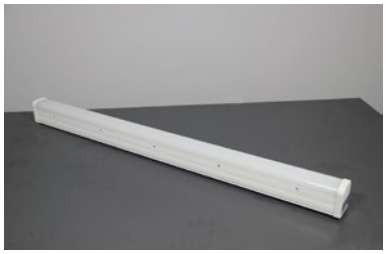




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	4200 lm	120lm/W	MP LED
42 W	2700-3000-4000-5000-6500K	5040 lm	120lm/W	MP LED
50 W	2700-3000-4000-5000-6500K	6000 lm	120lm/W	MP LED
82 W	2700-3000-4000-5000-6500K	9840 lm	120lm/W	MP LED

220 240 V~ | IP54 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Aveno Plus







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
101 W	2700-3000-4000-5000-6500K	15958 lm	158lm/W	SMD LED
14 W	2700-3000-4000-5000-6500K	2212 lm	158lm/W	SMD LED
28 W	2700-3000-4000-5000-6500K	4424 lm	158lm/W	SMD LED
38,5 W	2700-3000-4000-5000-6500K	5390 lm	158lm/W	SMD LED
41,5 W	2700-3000-4000-5000-6500K	6557 lm	158lm/W	SMD LED
42,5 W	2700-3000-4000-5000-6500K	6715 lm	158lm/W	SMD LED
55 W	2700-3000-4000-5000-6500K	7700 lm	158lm/W	SMD LED
60 W	2700-3000-4000-5000-6500K	9480 lm	158lm/W	SMD LED
77 W	2700-3000-4000-5000-6500K	12166 lm	158lm/W	SMD LED

220 240 V~ | IP54 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Helios

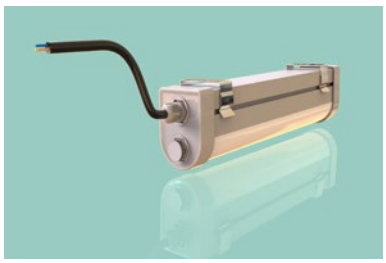



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
19 W	2700-3000-4000-5000-6500K	2527 lm	133lm/W	MP LED
30 W	2700-3000-4000-5000-6500K	3990 lm	133lm/W	MP LED
37 W	2700-3000-4000-5000-6500K	4921 lm	133lm/W	MP LED
55 W	2700-3000-4000-5000-6500K	7315 lm	133lm/W	MP LED


220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

PROJECTOR

Brin HB






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
106 W	2700-3000-4000-5000-6500K	14204 lm	134lm/W	MP LED
120 W	2700-3000-4000-5000-6500K	16080 lm	134lm/W	MP LED
40 W	2700-3000-4000-5000-6500K	5360 lm	134lm/W	MP LED
76 W	2700-3000-4000-5000-6500K	10184 lm	134lm/W	MP LED

220 240 V~ | IP54 | CRI>80 CRI>90 | 30°,60°,90° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Brin LB






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
106 W	2700-3000-4000-5000-6500K	14204 lm	134lm/W	MP LED
120 W	2700-3000-4000-5000-6500K	16080 lm	134lm/W	MP LED
40 W	2700-3000-4000-5000-6500K	5360 lm	134lm/W	MP LED
76 W	2700-3000-4000-5000-6500K	10184 lm	134lm/W	MP LED

220 240 V~ | IP54 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Onda 16 MP HB






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
110 W	2700-3000-4000-5000-6500K	14960 lm	136lm/W	MP LED
125 W	2700-3000-4000-5000-6500K	17000 lm	136lm/W	MP LED
145 W	2700-3000-4000-5000-6500K	19720 lm	136lm/W	MP LED
200 W	2700-3000-4000-5000-6500K	27200 lm	136lm/W	MP LED
55 W	2700-3000-4000-5000-6500K	7480 lm	136lm/W	MP LED
70 W	2700-3000-4000-5000-6500K	9520 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 30°,60°,90° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Onda 16 MP LB






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
110 W	2700-3000-4000-5000-6500K	14960 lm	136lm/W	MP LED
125 W	2700-3000-4000-5000-6500K	17000 lm	136lm/W	MP LED
145 W	2700-3000-4000-5000-6500K	19720 lm	136lm/W	MP LED
200 W	2700-3000-4000-5000-6500K	27200 lm	136lm/W	MP LED
55 W	2700-3000-4000-5000-6500K	7480 lm	136lm/W	MP LED
70 W	2700-3000-4000-5000-6500K	9520 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Onda Duo HB



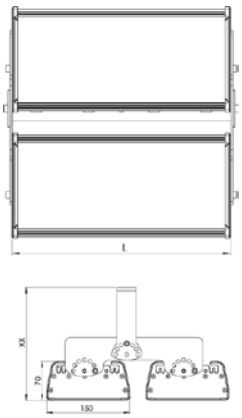


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2 × 110 W	2700-3000-4000-5000-6500K	29920 lm	136lm/W	MP LED
2 × 125 W	2700-3000-4000-5000-6500K	34000 lm	136lm/W	MP LED
2 × 145 W	2700-3000-4000-5000-6500K	39440 lm	136lm/W	MP LED
2 × 200 W	2700-3000-4000-5000-6500K	54400 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 30°,60°,90° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Onda Duo LB



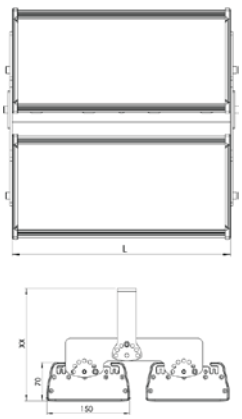


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2 × 110 W	2700-3000-4000-5000-6500K	29920 lm	136lm/W	MP LED
2 × 125 W	2700-3000-4000-5000-6500K	34000 lm	136lm/W	MP LED
2 × 145 W	2700-3000-4000-5000-6500K	39440 lm	136lm/W	MP LED
2 × 200 W	2700-3000-4000-5000-6500K	54400 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Onda Trio HB



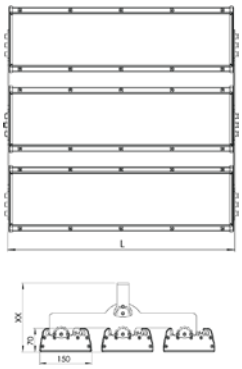


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 × 110 W	2700-3000-4000-5000-6500K	44880 lm	136lm/W	MP LED
3 × 125 W	2700-3000-4000-5000-6500K	51000 lm	136lm/W	MP LED
3 × 145 W	2700-3000-4000-5000-6500K	59160 lm	136lm/W	MP LED
3 × 200 W	2700-3000-4000-5000-6500K	81600 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 30°,60°,90° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Onda Trio LB



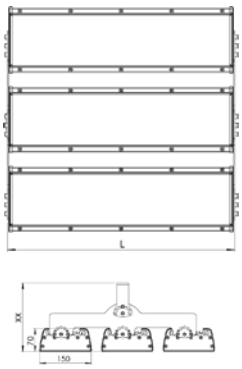


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 × 110 W	2700-3000-4000-5000-6500K	44880 lm	136lm/W	MP LED
3 × 125 W	2700-3000-4000-5000-6500K	51000 lm	136lm/W	MP LED
3 × 145 W	2700-3000-4000-5000-6500K	59160 lm	136lm/W	MP LED
3 × 200 W	2700-3000-4000-5000-6500K	81600 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Zenit





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
19 W	2700-3000-4000-5000-6500K	2584 lm	136lm/W	MP LED
33 W	2700-3000-4000-5000-6500K	4488 lm	136lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

EXTERIOR

Street & Road Lighting

Kresta – 4






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
15 W	2700-3000-4000-5000-6500K	1545 lm	103lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Orla Pole






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
40 W	2700-3000-4000-5000-6500K	2000 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 100° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Rivena






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
35 W	2700-3000-4000-5000-6500K	3850 lm	110lm/W	HP LED
70 W	2700-3000-4000-5000-6500K	7700 lm	110lm/W	HP LED

220 240 V~ | IP65 | CRI>80 | 30°,60°,90,157×90° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Siro



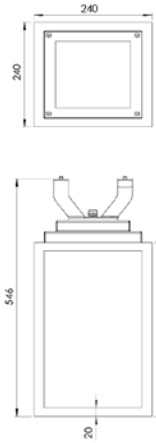

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
11 W	2700-3000-4000-5000-6500K	550 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL


Lumen value is given according to 3000K value.

EXTERIOR

Park & Garden IP65 Protection

Emino






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1680 lm	120lm/W	HP LED

220 240 V~ | IP65 | CRI>80 | 12°,36°,48°,10×35° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Gressa Mini






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	171 lm	57lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	285 lm	57lm/W	HP LED

220 240 V~ | IP66 | CRI>80 | 24°,36° | ADJUSTABLE 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

Gressa Mini REF






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	485 lm	97lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	776 lm	97lm/W	COB LED

220 240 V~ | IP66 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Kresta







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14,5 W	2700-3000-4000-5000-6500K	1247 lm	86lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kresta – 2

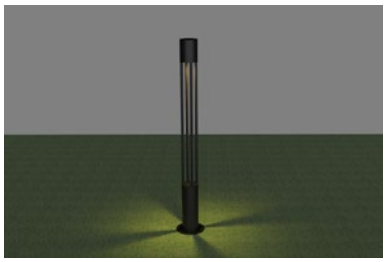




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4,5 W	2700-3000-4000-5000-6500K	360 lm	80lm/W	HP LED

220 240 V~ | IP65 | CRI>80 | 60° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kresta – 3






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	4000K	1500 lm	108lm/W	E27 LED LAMP

220 240 V~ | IP65 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Kresta – 5






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1540 lm	110lm/W	HP LED

220 240 V~ | IP65 | CRI>80 | 30°,60°,90°,157×90° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Mirae – 110 One Way






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4 W	3000-4000-6500K	20 lm	5 lm/W	HP LED
6 W	3000-4000-6500K	30 lm	5 lm/W	HP LED

220 240 V~ | IP66 | CRI>80 CRI>90 | 22° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Mirae – 110 Two Way






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
4 W	3000-4000-6500K	40 lm	10 lm/W	HP LED
6 W	3000-4000-6500K	60 lm	10 lm/W	HP LED

220 240 V~ | IP66 | CRI>80 CRI>90 | 22° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Mirae – 110 UP






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	171 lm	57lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	285 lm	57lm/W	HP LED

220 V~ 240 V~ | IP66 | CRI>80 | 24°,36° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Mirae – 110 UP REF







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	485 lm	97lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	776 lm	97lm/W	COB LED

220 V~ 240 V~ | IP66 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Mirae – 50

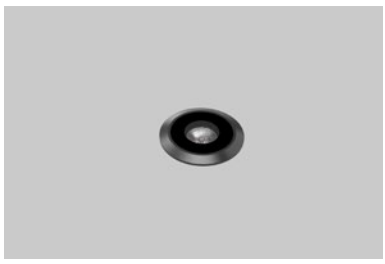

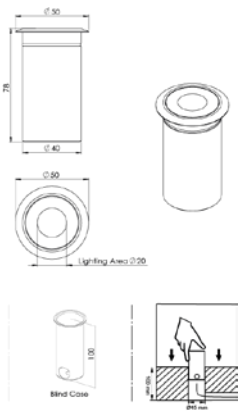



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
2,5 W	2700-3000-4000-5000-6500K	200 lm	80lm/W	HP LED

220 V~ 240 V~ | IP65 | CRI>80 | 10°,25°,40°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Mirae – 85

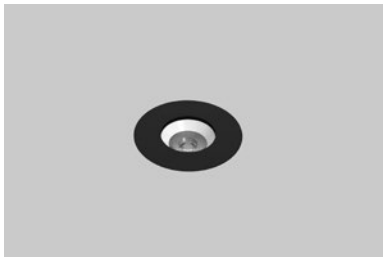

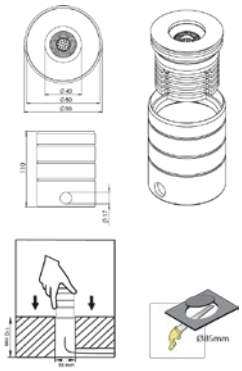


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	171 lm	57lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	285 lm	57lm/W	HP LED

220 240 V~ | IP66 | CRI>80 | 24°,36° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Orla



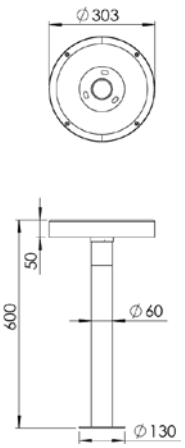


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	700lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 100° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Suna



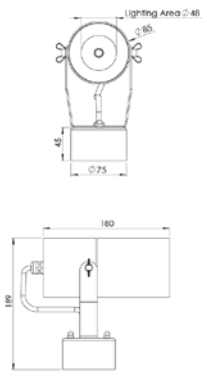



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	707 lm	101lm/W	COB LED
9 W	2700-3000-4000-5000-6500K	909 lm	101lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 60° | Class I | F | RAL

Lumen value is given according to 4000K value.

Tavon

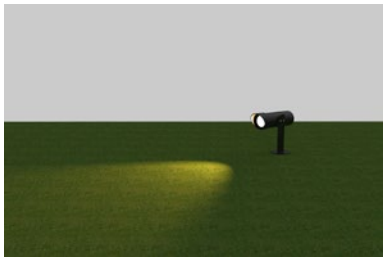





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	707 lm	101lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 15°,24°,36° | ADJUSTABLE 90° | Class I | F | RAL

Lumen value is given according to 4000K value.

Tavon – S

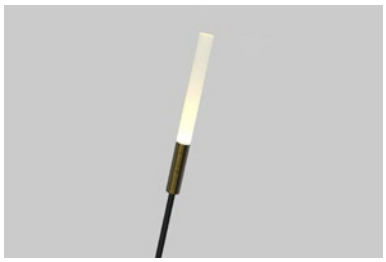




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
1,5 W	2700-3000-4000-5000-6500K	90 lm	60lm/W	G4 LED LAMP

220 240 V~ | IP65 | CRI>90 | 19°,38° | FIXED | Class III | F | RAL

Lumen value is given according to 3000K value.

Velin





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	910 lm	65lm/W	HP LED
7 W	2700-3000-4000-5000-6500K	455 lm	65lm/W	HP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Velin Mini





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5,3 W	2700-3000-4000-5000-6500K	345 lm	65lm/W	HP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL


Lumen value is given according to 3000K value.

EXTERIOR

Facade IP65 Protection

Alor



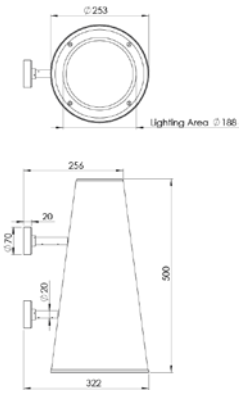



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
15,5 W	2700-3000-4000-5000-6500K	1333 lm	86lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 110° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Enzo

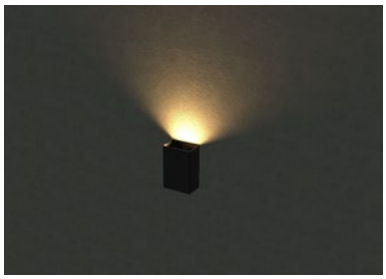




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,5 W	2700-3000-4000-5000-6500K	175 lm	50lm/W	MP LED
6,5 W	2700-3000-4000-5000-6500K	325 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 65° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Enzo – 2






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6,5 W	2700-3000-4000-5000-6500K	325 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 65° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Enzo Two Way







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	500 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 65° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Kivo

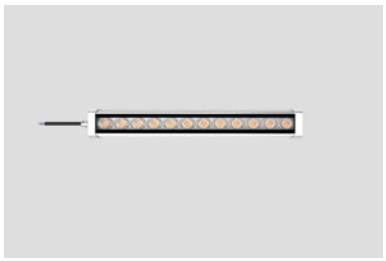





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
10 W	2700-3000-4000-5000-6500K	1200 lm	120lm/W	HP LED
15 W	2700-3000-4000-5000-6500K	1800 lm	120lm/W	HP LED
20 W	2700-3000-4000-5000-6500K	2400 lm	120lm/W	HP LED
30 W	2700-3000-4000-5000-6500K	3600 lm	120lm/W	HP LED
36,5 W	2700-3000-4000-5000-6500K	4380 lm	120lm/W	HP LED

220 240 V~ | IP66 | CRI>80 | 10°,25°,40°,60°, | ADJUSTABLE 90° & 90° | Class I | F | RAL

Lumen value is given according to 3000K value.

Kovra

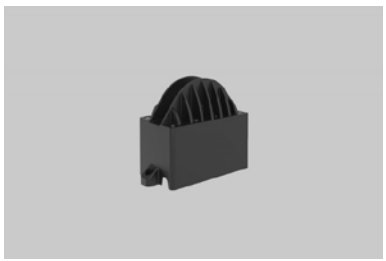




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3 W	2700-3000-4000-5000-6500K	240 lm	80lm/W	HP LED
5 W	2700-3000-4000-5000-6500K	400 lm	80lm/W	HP LED

220 240 V~ | IP65 | CRI>80 | 180°x3° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Nysa



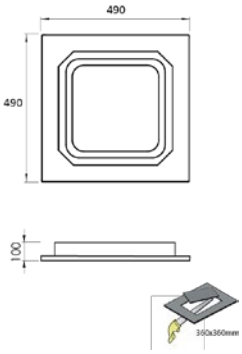


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
110 W	2700-3000-4000-5000-6500K	14960 lm	136 lm/W	MP LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 30°,60°,90°,120° | FIXED | Class I | F | RAL

Lumen value is given according to 5000K value.

Pavo – 60 PC



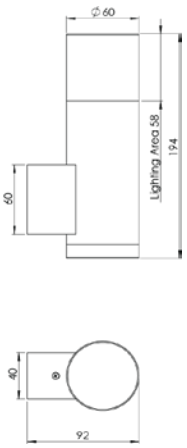


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	2700-3000-4000-5000-6500K	540 lm	90lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	720 lm	90lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Pavo – 60 Pillar



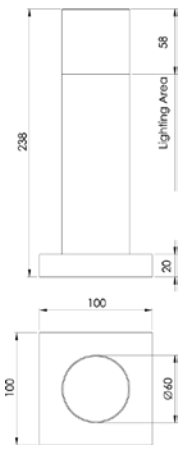


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	2700-3000-4000-5000-6500K	540 lm	90lm/W	COB LED
8 W	2700-3000-4000-5000-6500K	720 lm	90lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 120° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Pavo 60 One Way







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	707 lm	101lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Pavo 60 Two Way

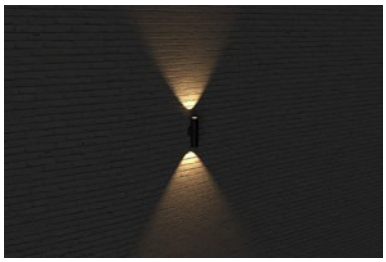

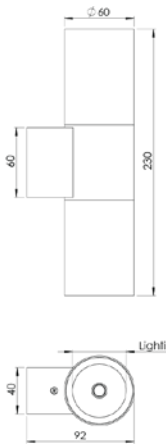



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	707 lm	101lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Pavo 85 One Way

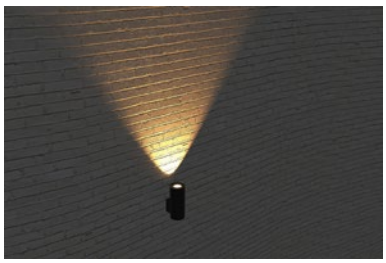

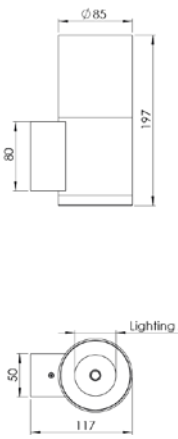


Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
7 W	2700-3000-4000-5000-6500K	707 lm	101lm/W	COB LED


220 240 V~ | IP65 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Pavo 85 Two Way









Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1414 lm	101lm/W	COB LED

220 240 V~ | IP65 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class I | F | RAL

Lumen value is given according to 4000K value.

Pavo Flat

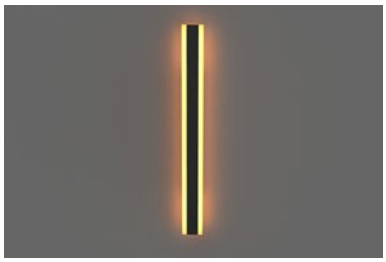

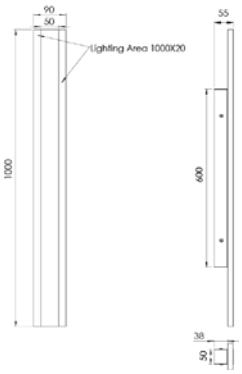



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
24 W	2700-3000-4000-5000-6500K	672 lm	28lm/W	COB LED

220 240 V~ | IP65 | CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Tressa

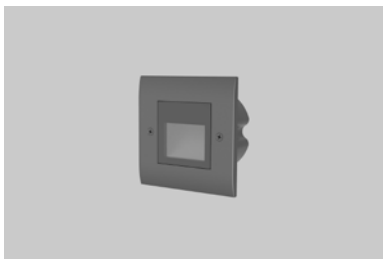

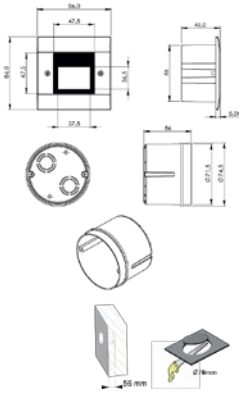



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,8 W	2700-3000-4000-5000-6500K	190 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Tressa – C

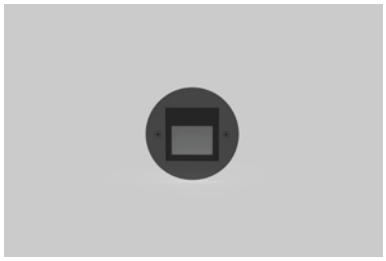

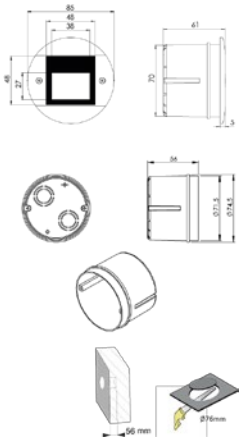



Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
3,8 W	2700-3000-4000-5000-6500K	190 lm	50lm/W	MP LED

220 240 V~ | IP65 | CRI>80 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

Zavel

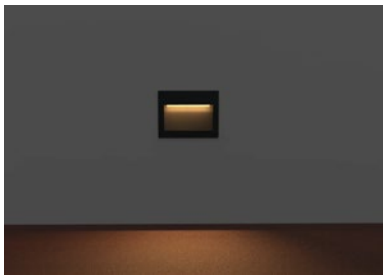

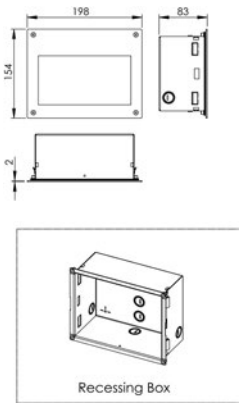

Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
5 W	2700-3000-4000-5000-6500K	125 lm	25lm/W	MP LED


220 240 V~ | IP65 | CRI>80 CRI>90 | 19°,38° | FIXED | Class I | F | RAL

Lumen value is given according to 3000K value.

UL CERTIFICATIONS

Aven UL






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm		COB LED
6 W	2700-3000-4000-5000-6500K	618 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 16° & 16° - 180° | Class II | F | RAL

Lumen value is given according to 4000K value.

Elva – 60 UL






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
6 W	2700-3000-4000-5000-6500K	618 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Elva – 76 UL






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm		COB LED
6 W	2700-3000-4000-5000-6500K	618 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 22° & 22° - 360° | Class II | F | RAL

Lumen value is given according to 4000K value.

Elva – 100 UL







Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1470 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

Kemi UL

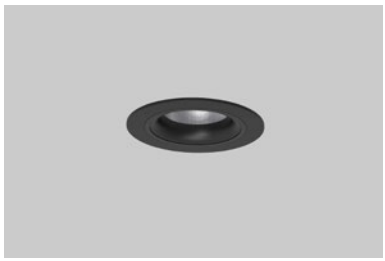




Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1596 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 24°,40°,60° | ADJUSTABLE 90° - 350° | Class I | F | RAL

Lumen value is given according to 4000K value.

Miro – 110 UL






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm		COB LED
20 W	2700-3000-4000-5000-6500K	2060 lm		COB LED
6 W	2700-3000-4000-5000-6500K	618 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 16° & 16° - 180° | Class II | F | RAL

Lumen value is given according to 4000K value.

Taro UL






Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1400 lm		COB LED
6W	2700-3000-4000-5000-6500K	600 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | ADJUSTABLE 90° - 350° | Class I | F | RAL

Lumen value is given according to 4000K value.

Tova UL





Power	Color Temperature	Lumen	Luminaire Efficiency	Light Source
14 W	2700-3000-4000-5000-6500K	1442 lm		COB LED
6 W	2700-3000-4000-5000-6500K	618 lm		COB LED

220 V~ 240 V~ | IP20 | CRI>80 CRI>90 | 15°,24°,36°,60° | FIXED | Class II | F | RAL

Lumen value is given according to 4000K value.

REKIALIGHT