

# Arden – 12 Applique

REKIALIGHT

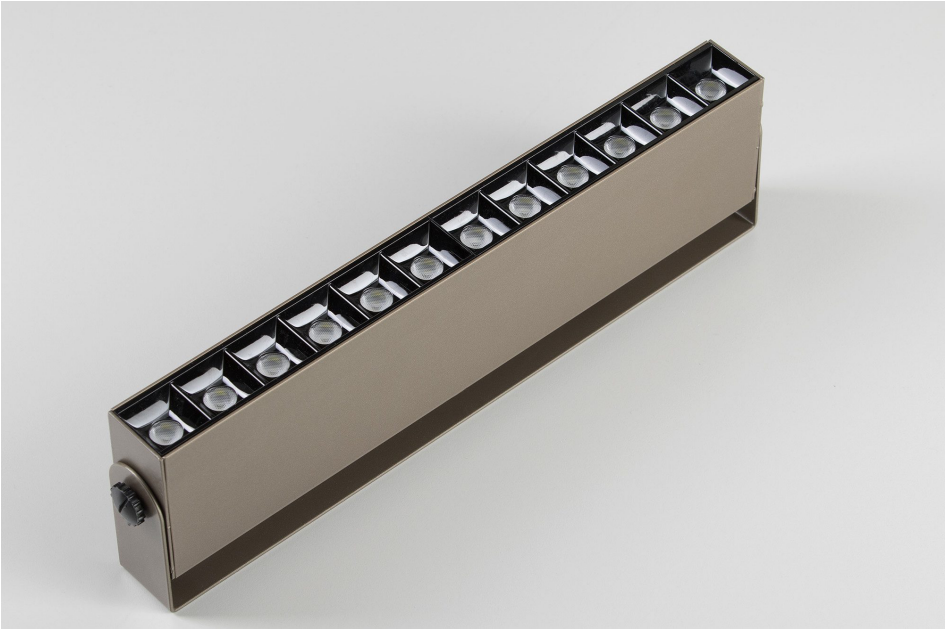

| | |
|---|---|
| **Product Family** | Arden |
| **Adjustability** | Adjustable: 90° & 90° |
| **Color** | White- Black- Gray- RAL |
| **Mounting Type** | Surface Mounted |
| **Body** | Extruted aluminium body with electrostatic powder coated |

**DIMENSIONS**




| | |
|---|---|
| **Light Source** | HPLED |
| **Color Temperature** | 2700-3000-4000-5000-6500K |
| **Color Rendering Index** | CRI>80 |
| **Power** | 14 W |
| **Power Factor** | Pf>90 |
| **Luminaire Efficiency** | 120lm/W |
| **Light Beam Angle** | 12°,36°,48°,10X35° Elptc |
| **Lumen** | 1680 lm |
| **Operating Voltage** | 220-240V AC / 50-60 Hz |
| **Light Source Lifetime** | 50.000 hours Led lifetime |
| **Optic** | High efficiency optic in metallized thermoplastic and built into the innovative anti-glare screen |

| | |
|---|---|
| **Control Type** | On/Off |
| **Electrical Insulation Class** | Class II |
| **Optional Features** | |

| | |
|---|---|
| **Sealing** | IP20 |
| **Weight** | 1,45 Kg |
| **Dimensions** | 33 × 326 × 91 mm |

Lumen value is given according to 3000K value.
Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.