

Bruna – 2 Indirect

REKIALIGHT

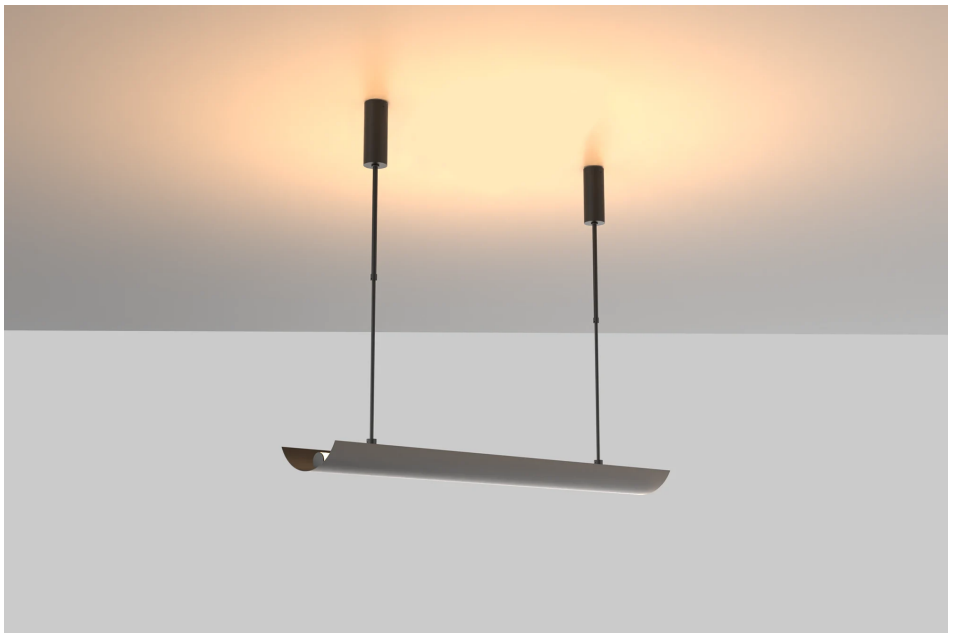

Product Family	Bruna
Adjustability	Fixed
Color	White- Black- Gray- RAL
Mounting Type	Pendant
Body	Metal body

DIMENSIONS



Light Source	MP LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80 , CRI>90
Power	25 W
Power Factor	Pf>90
Luminaire Efficiency	97lm/W
Light Beam Angle	120°
Lumen	2425 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency polycarbonate diffuser

Control Type	On/Off
Electrical Insulation Class	Class II
Optional Features	Emergency kit system can be integrated

Sealing	IP40
Weight	4 Kg
Dimensions	203 × 1200 x Min-150/Max-200 cm

Lumen value is given according to 4000K value.
Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.