

Duna – 2

REKIALIGHT

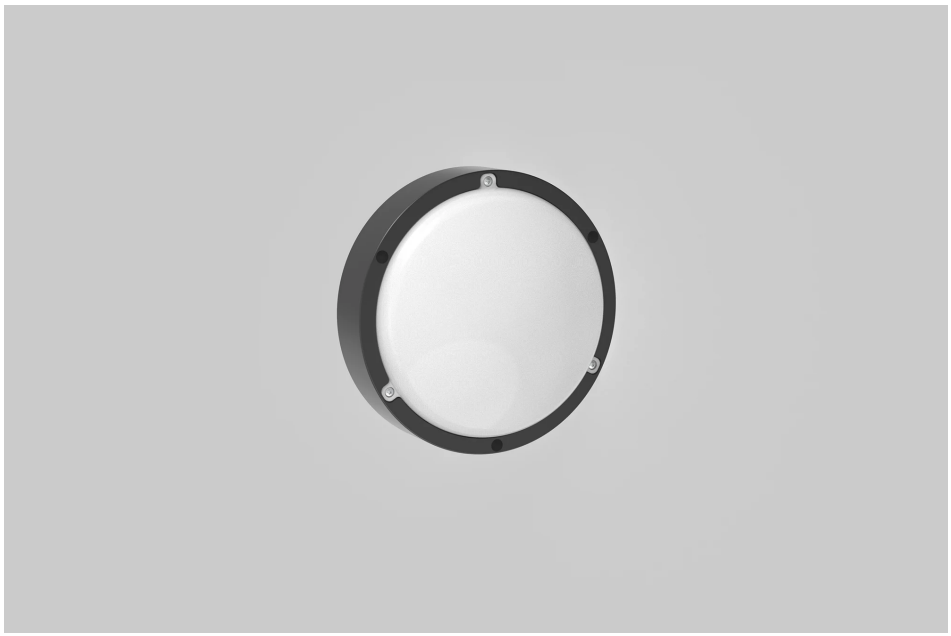

Product Family	Duna
Adjustability	Fixed
Color	White- Black
Mounting Type	Surface Mounted
Body	Injection policarbonate body
Light Source	MP LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80 , CRI>90
Power	16 W
Power Factor	Pf>90
Luminaire Efficiency	113lm/W
Light Beam Angle	120°
Lumen	1808 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency milky policarbonate diffuser
Control Type	On/Off
Electrical Insulation Class	Class II
Optional Features	Emergency kit system can be integrated, microwave sensor option
Sealing	IP40
Weight	0,6 Kg
Dimensions	Ø216 × 77 mm

DIMENSIONS

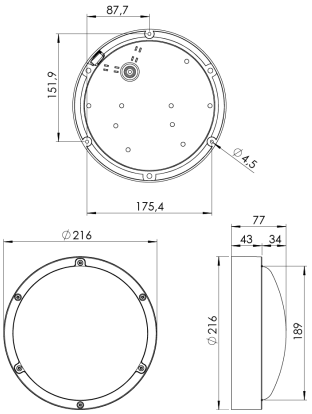

Lumen value is given according to 4000K value.
Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.

CE ISO 9001:2015 ISO 14001:2004 5 YEAR WARRANTY