
# Kendo – 2 S

REKIALIGHT

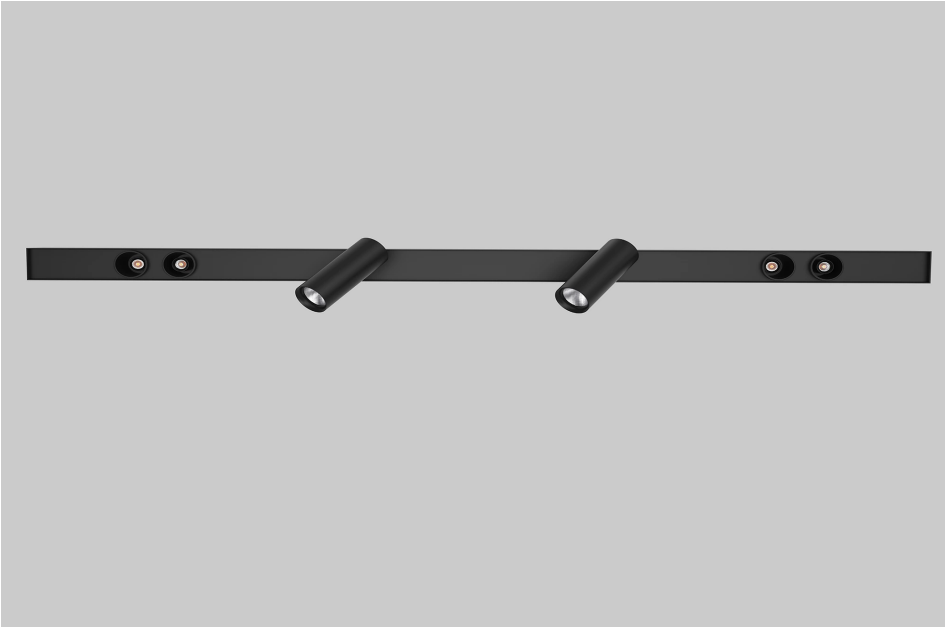


| | |
|---|---|
| **Product Family** | Kendo |
| **Adjustability** | Adjustable: 350° - 90° + 15° & 15° |
| **Color** | White- Black- Gray- RAL |
| **Mounting Type** | Surface Mounted |
| **Body** | Extruted aluminium body with electrostatic powder coated |

| | |
|---|---|
| **Light Source** | HP LED/ COB LED |
| **Color Temperature** | 2700-3000-4000-5000-6500K |
| **Color Rendering Index** | CRI>80 CRI>90 |
| **Power** | 38 W |
| **Power Factor** | Pf>90 |
| **Luminaire Efficiency** | 105.5 lm/W - 96.5 lm/W |
| **Light Beam Angle** | 10°,25°,40°,60° |
| **Lumen** | 3674 lm |
| **Operating Voltage** | 220-240V AC / 50-60 Hz |
| **Light Source Lifetime** | 50.000 hours Led lifetime |
| **Optic** | High effciency acrilic lens |

| | |
|---|---|
| **Control Type** | On/Off- Dali |
| **Electrical Insulation Class** | Class I |
| **Optional Features** | Emergency kit system can be integrated |

| | |
|---|---|
| **Sealing** | IP20 |
| **Weight** | 5.2 kg |
| **Dimensions** | 65×85xL1500 mm |

**DIMENSIONS**




Lumen value is given according to 4000K value.
Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.



CE ISO 9001:2015 ISO 14001:2004 5 YEAR WARRANTY