
Kivo

REKIALIGHT

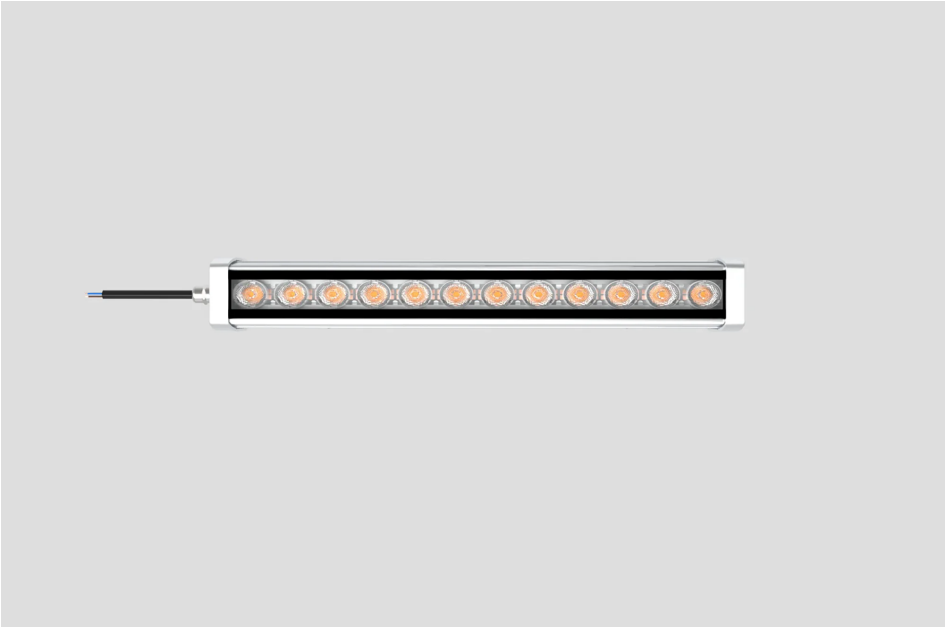


Product Family	Kivo
Adjustability	Adjustable: 90° & 90°
Color	MAT Eloksal
Mounting Type	Wallwasher
Body	Anodized aluminium body and tempered glass

Light Source	HP LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80
Power	36,5 W
Power Factor	Pf>90
Luminaire Efficiency	120lm/W
Light Beam Angle	10°,25°,40°,60°,
Lumen	4380 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency acrylic lens

Control Type	On/Off- Dali
Electrical Insulation Class	Class I
Optional Features	

Sealing	IP66
Weight	3,25 Kg
Dimensions	58 × 78 x L : 1195 mm

DIMENSIONS

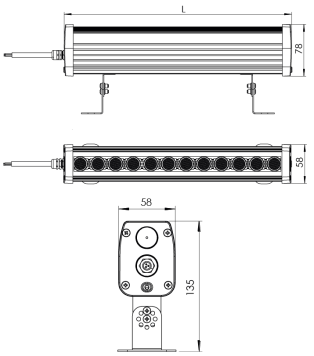

Lumen value is given according to 3000K value.
Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.

CE ISO 9001:2015 ISO 14001:2004 5 YEAR WARRANTY