

Tirra

REKIALIGHT

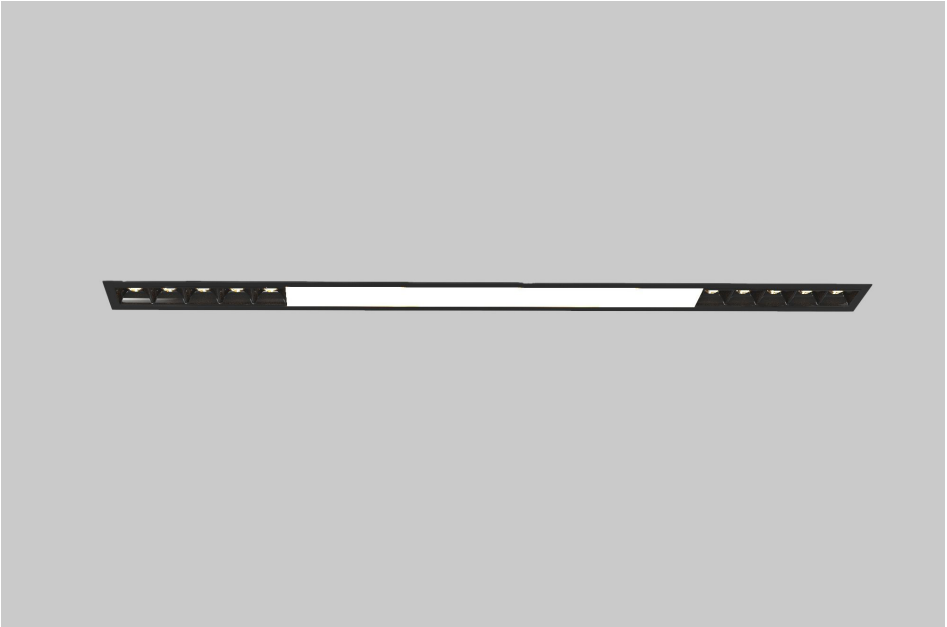

Product Family	Tirra
Adjustability	Fixed
Color	White- Black- Gray- RAL
Mounting Type	Recessed Mounted
Body	Extruted aluminium body with electrostatic powder coated, electrostatic powder coated sheet metal side cover
Light Source	HP LED/ MP LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80
Power	28 W
Power Factor	Pf>90
Luminaire Efficiency	73 lm/W
Light Beam Angle	12°,36°,48°,10 X 35° Elptc.
Lumen	2044 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency optic in metallized thermoplastic, built into the innovative anti-glare screen and opal diffusers
Control Type	On/Off- Dali
Electrical Insulation Class	Class II
Optional Features	Emergency kit system can be integrated
Sealing	IP20
Weight	1.65 kg
Dimensions	45,1 × 54,7 × 624,1 mm

DIMENSIONS



Lumen value is given according to 3000K value.
Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.

CE ISO 9001:2015 ISO 14001:2004 5 YEAR WARRANTY